



# DL 2821 LED - TRIMLESS

# MICRO-LENS / REFLECTORS ■ LED




DL 2821 LED - TRIMLESS 2W

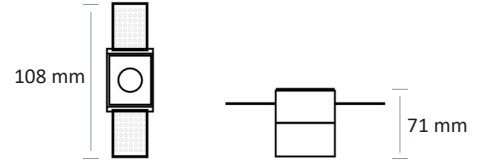


36X36 mm 




DL 2821 LED - TRIMLESS 6W

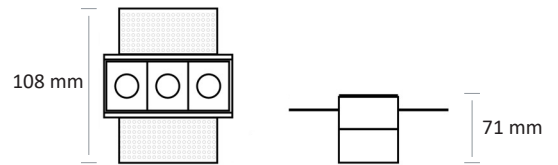


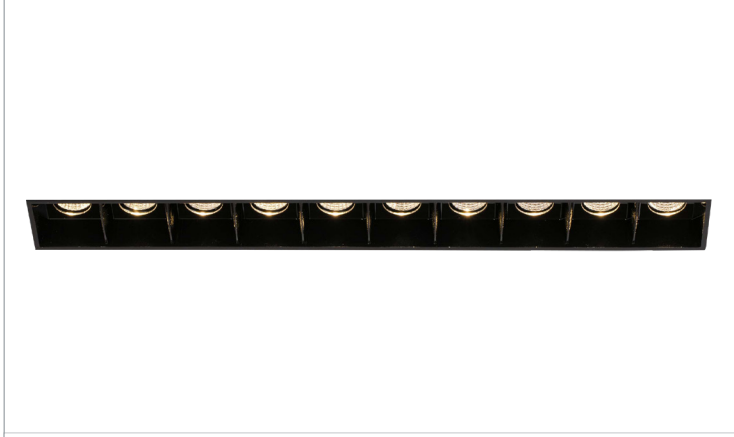
83X36 mm 




DL 2821 LED - TRIMLESS 5W

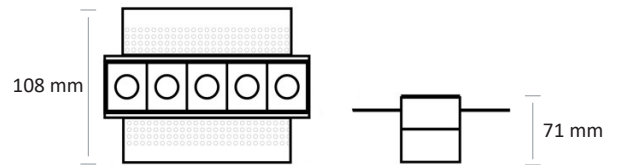


130X36 mm 



DL 2821 LED - TRIMLESS 20W

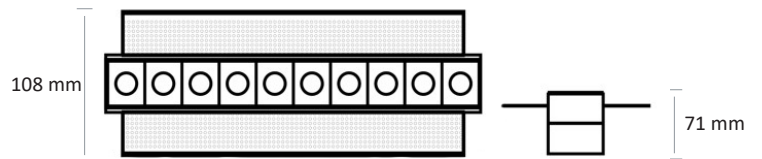

263X36 mm 

Colour(s)



# DL 2821 LED - TRIMLESS

- Recessed luminaire for LINEAR LED module, maximum 210 lumens
- CRI of 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 105 lm/W
- Housing made of painted steel
- Static heat sink
- **Weight:** approx. 0,05 kg
- **Driver(s):** Fixe, Fixed, Dimmable driver DALI (CDIMMDALI)

## Driver(s)



## Beam(s)



## Standards

Class III | IP 20 | 650°

## Efficiency energy class



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
DL 2821 LED TRIMLESS 210-930	2W	210 lumens	105 lm/W	3000 K	90
DL 2821 LED TRIMLESS 630-930	6W	630 lumens	105 lm/W	3000 K	90
DL 2821 LED TRIMLESS 1000-930	10W	1050 lumens	105 lm/W	3000 K	90
DL 2821 LED TRIMLESS 2100-930	20W	2100 lumens	105 lm/W	3000 K	90