

## DL 2822 LED - ASY



Colour(s)



130X36 mm



## MICRO-LENS / REFLECTORS ■ LED

- Recessed luminaire for LINEAR LED module, maximum 1250 lumens
- CRI of 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 96,8 lm/W
- Housing made of painted steel
- Static heat sink
- **Weight:** approx. 0,4 kg
- **Driver(s):** Fixe, Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)



Standards

Class III | IP 20 | 650°


Efficiency  
energy class



Beam(s)



Dimensions

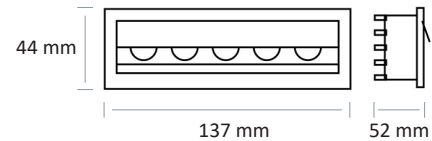

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
DL 2822 LED ASY - 600-930	6,2W	600 lumens	96,8 lm/W	3000 K	90
DL 2822 LED ASY - 1200-930	10W	1250 lumens	125 lm/W	3000 K	90