

## PR 5056-ELLIPTIC LED



### Colour(s)



## LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 4853 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 2 500 K, 3 000 K, 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 144,5 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Static heat sink
- **Weight:** approx. 0,9 kg
- **Driver(s) :** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Photobiological risk group 0**

### Driver(s)




### Standards

Class II | IP 20 | 650° | GPO

### Efficiency energy class



### Dimensions

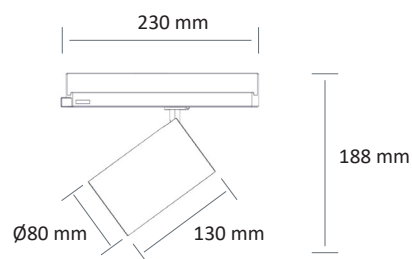


ITEM	SECTION	DALI	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
PR 5056-Elliptic LED 3400-930	-	yes	23,4W	28,2W	3411 lumens	121 lm/W	3000 K	90
PR 5056-Elliptic LED 3600-940	-	yes	23,4W	28,2W	3578 lumens	127 lm/W	4000 K	90
PR 5056-Elliptic LED 3900-830	-	yes	23,6W	28,8W	3882 lumens	135 lm/W	3000 K	80
PR 5056-Elliptic LED 4100-840	-	yes	23,4W	28,2W	4071 lumens	144,5 lm/W	4000 K	80
PR 5056-Elliptic LED 4000-930	-	no	28,8W	33,8W	4071 lumens	121 lm/W	3000 K	90
PR 5056-Elliptic LED 4300-940	-	no	28,8W	33,8W	4272 lumens	127 lm/W	4000 K	90
PR 5056-Elliptic LED 4600-830	-	no	29W	34,1W	4640 lumens	136 lm/W	3000 K	80
PR 5056-Elliptic LED 4900-840	-	no	28,8W	33,8W	4853 lumens	143,5 lm/W	4000 K	80
PR 5056-Elliptic LED 2200-925-Bakery	Bakery	yes	23,3W	28,4W	2213 lumens	78 lm/W	2500 K	90
PR 5056-Elliptic LED 2700-925-Bakery	Bakery	no	28,7W	33,8W	2635 lumens	78 lm/W	2500 K	90
PR 5056-Elliptic LED 2200-930-butchery	Butchery	yes	23,2W	28,4W	2297 lumens	81 lm/W	3000 K	90
PR 5056-Elliptic LED 2700-930-butchery	Butchery	no	28,7W	33,8W	2737 lumens	81 lm/W	3000 K	90

# PR 5056-ELLIPTIC LED

## LIGHT DISTRIBUTION

Elliptic beams  
LOR 87%

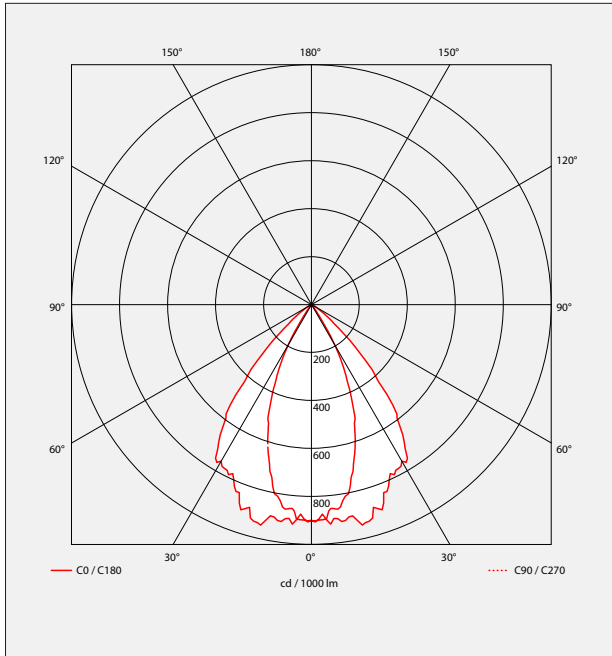

## CONFIGURATION

