



Colour(s)



PROFILES ■ LED

- Rectangular lighting system with direct lighting for TL5 or TL-D fluorescent lamps, maximum 80W
- Can be mounted continuous row
- Rectangular section, size 180x120 mm
- Steel white (GLB), rosted (VS) glass, clear (DC), opal (DO) or grooved and clear (DSC) diffuser made of polycarbonate
- Housing made of extruded aluminium profile
- Cover and endcap made of aluminium
- Gears : Electronic (EVG), Dimmable electronic (EVG DIMM), Dimmable electronic DALI (EVG DIMM DALI)
- Options : Lighting sensor and-or movement detector (CEL)

Driver(s)



Standards

Class I | IK07 | 850°

Efficiency energy class




Profile(s)



Luminaire(s)




Dimensions

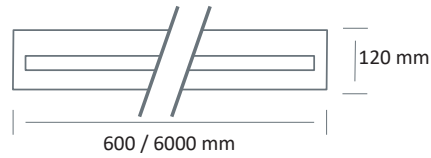

OPTICALS




CROSS SECTION

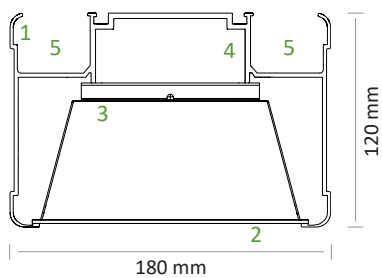


- 1 Body made of extruded aluminium profile
- 2 Aluminium cover
- 3 Lighting tray and aluminium reflector
- 4 Lighting wiring
- 5 Cable tray compartment

LIGHTING CONFIGURATION

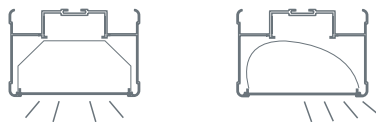

FIXING

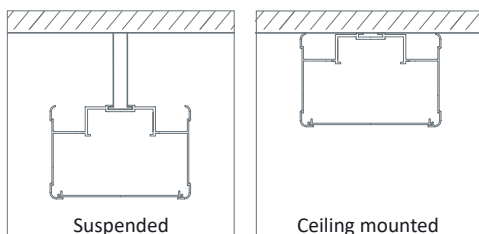

ACCESSORIES

