



Coulour(s)



PROFILES ■ LED

- Ovoid lighting system with direct and indirect lighting for TL5 or TL-D fluorescent lamps, maximum 80W
- Can be mounted continuous row
- Ovoid section, size 325x185 mm
- Steel white (GLB), frosted (VS) glass, clear (DC), opal (DO) or grooved and clear (DSC) diffuser made of polycarbonate
- Suspended luminaire by threaded rod for easier installation
- Housing made of extruded aluminium profile
- Endcap made of aluminium
- **Gears** : Electronic (EVG), Dimmable electronic (EVG DIMM), Dimmable electronic DALI (EVG DIMM DALI)
- **Options** : Lighting sensor and-or movement detector (CEL)

Driver(s)



Standards

Class I | IK07 | 850°

Efficiency
energy class




Profile(s)




Dimensions


Luminaire(s)

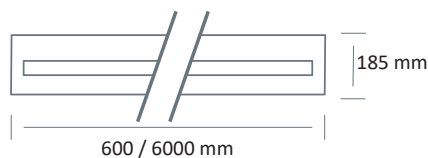

OPTICALS



CROSS SECTION

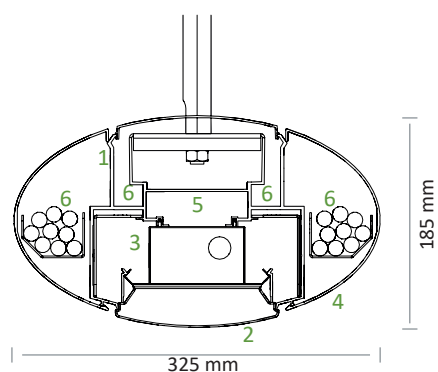


- 1 Ame en profil d'aluminium extrudé
- 2 Couvercle en profil d'aluminium extrudé ou optique
- 3 Appareil d'éclairage
- 4 Couvercle en profil d'aluminium extrudé
- 5 Pré câblage luminaire
- 6 Compartiment passage de câbles

LIGHTING CONFIGURATION



FIXING

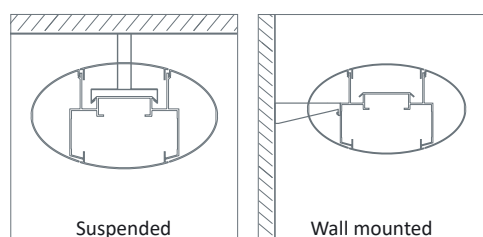

Suspended

Wall mounted

ACCESSORIES

