

# LS 2316-A LED

## TRACK SUSPENDED LUMINAIRE

- Track suspended luminaire for LINEAR LED module, maximum 4357 lumens
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K, 3 500 K, 4 000 K and 6 500 K
- 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 106 lm/W
- Micro prismatic Diffuser
- Housing made of painted steel
- Static heat sink
- Weight:** approx. 2,6 Kg
- Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

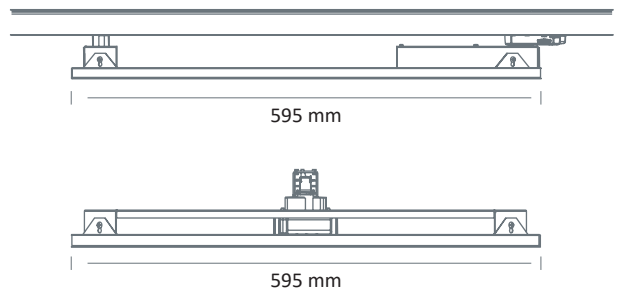

### Colour(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 2316-A LED-3200-830	32 W	3220 lumens	100 lm/W	3000 K	80	F
LS 2316-A LED-3300-835	32 W	3310 lumens	102,8 lm/W	3500 K	80	F
LS 2316-A LED-3400-840	32 W	3400 lumens	106 lm/W	4000 K	80	F
LS 2316-A LED-3400-865	32 W	3400 lumens	106 lm/W	6500 K	80	F
LS 2316-A LED-4100-830	43 W	4125 lumens	96 lm/W	3000 K	80	F
LS 2316-A LED-4200-835	43 W	4241 lumens	98,6 lm/W	3500 K	80	F
LS 2316-A LED-4300-840	43 W	4357 lumens	101 lm/W	4000 K	80	F
LS 2316-A LED-4300-865	43 W	4357 lumens	101 lm/W	6500 K	80	F