



LS 5151 LED

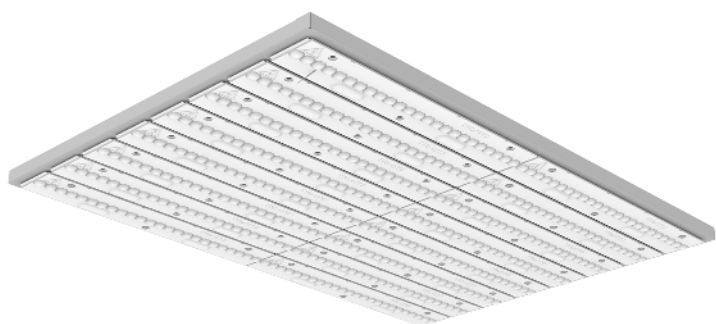


Colour(s)

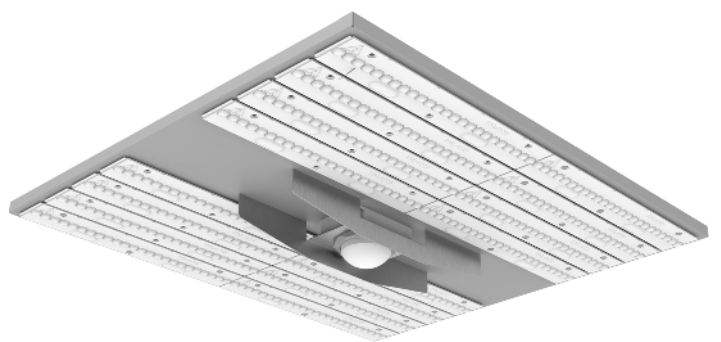

Light distribution



SYM DASY ELL INT SI

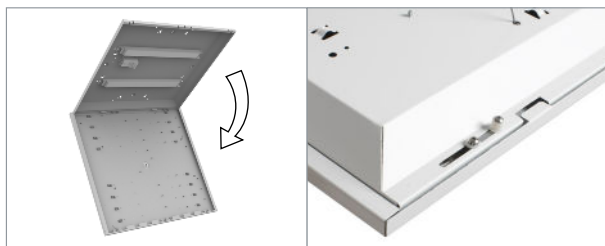

SUSPENDED LUMINAIRES ■ LED

- Suspended luminaires for module LED, maximum 41 800 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 181,9 lm/W
- Housing made of painted steel
- Static heat sink
- Maintenance from below
- Latch locking system
- Hanging by ropes or canalised stirrups
- **Driver(s)**: Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s)**: Fast connector (CORD), Lighting sensor and-or movement detection (CEL)


Driver(s)



Standards

Class I | IP 20 | 650°



Dimensions

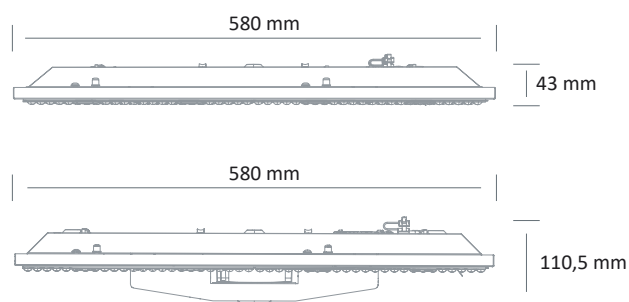


| ITEM | DIMENSIONS WITH CELL (in mm) | DIMENSIONS WITHOUT CELL (in mm) | POWER | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|----------------------------|------------------------------|---------------------------------|--------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| LS 5151-A LED 16000-840 | 580 x 322 | 580 x 211 | 88,2W | 93,8W | 16720 lumens | 178,2 lm/W | 4000 K | 80 | C |
| LS 5151-B LED 21400-840 | 580 x 421 | 580 x 310 | 111 W | 118,1 W | 21480 lumens | 181,9 lm/W | 4000 K | 80 | C |
| LS 5151-B LED 24000-840 | 580 x 421 | 580 x 310 | 132,4W | 139,4W | 25080 lumens | 179,9 lm/W | 4000 K | 80 | C |
| LS 5151-C LED 32000-840 | 580 x 520 | 580 x 409 | 176,8W | 188W | 33440 lumens | 177,8 lm/W | 4000 K | 80 | C |
| LS 5151-D LED 40000-840 | 580 x 619 | 580 x 508 | 221W | 233,6W | 41800 lumens | 178,9 lm/W | 4000 K | 80 | C |

LIGHT DISTRIBUTION


Intensive :
LOR 90 %

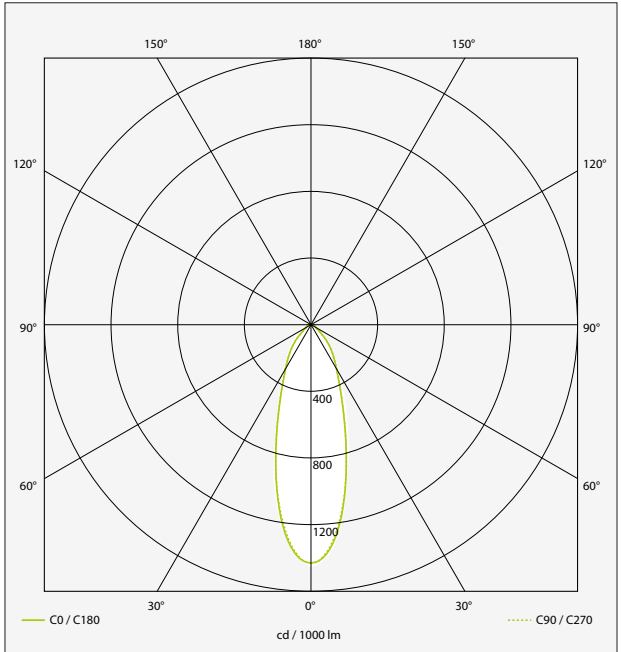


Mid-intensive
LOR 96 %

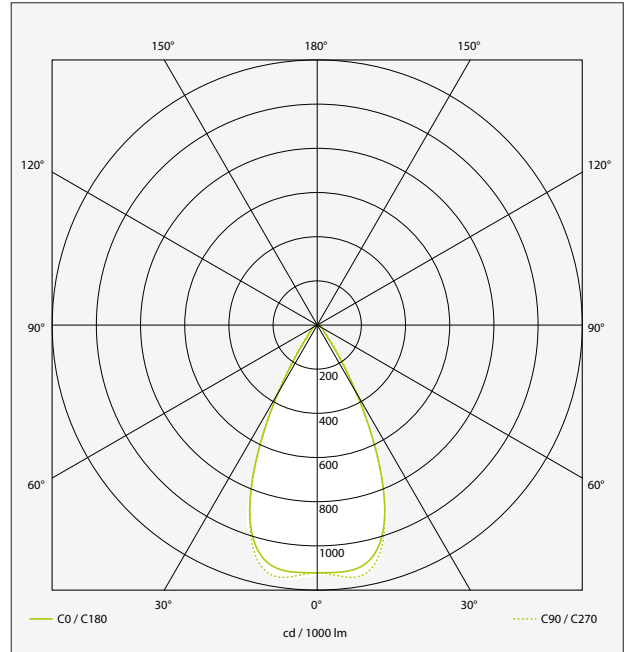

Elliptical
LOR 96,5 %

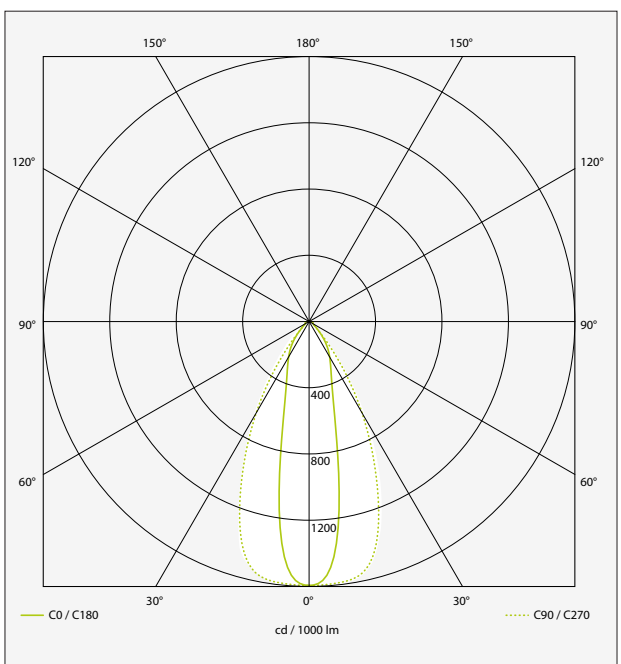

Symmetrical
LOR 97 %

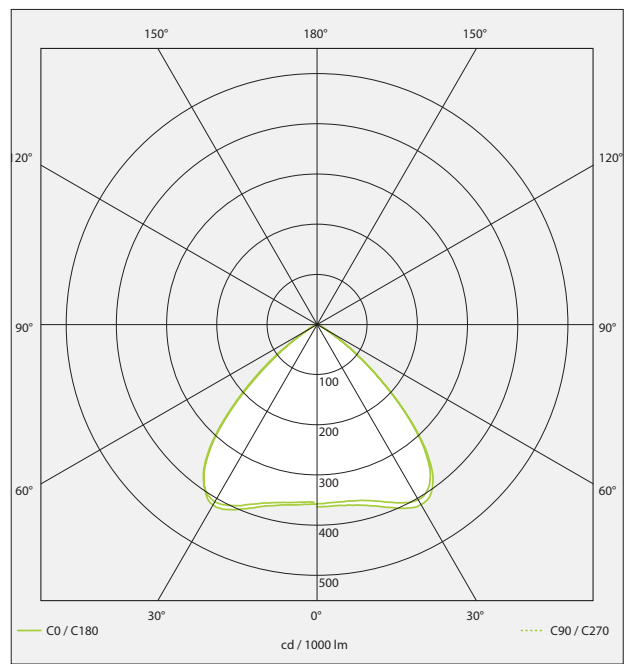

■ LIGHT DISTRIBUTION

Double asymmetrical:
LOR 97 %



DASY

