

## PR 5051-B LED



### Colour(s):



## WALL WASHERS LED


- Orientable track suspended luminaire, LED SPOT module, maximum 4 187 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 124,5 lm/W
- 3-circuits track adaptor
- Housing made of painted steel
- Static heat sink
- **Weight:** approx. 1,5 kg
- **Driver(s):** Fixed, DALI Gradation Converter (CDIMMDALI)

### Driver(s)




### Standards

Class I | IP 20 | 650°

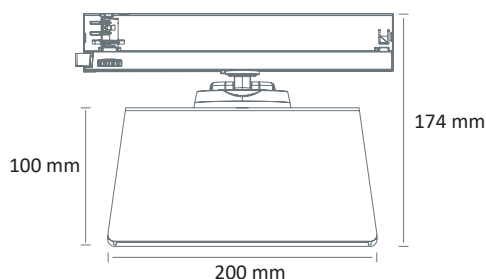

### Dimensions

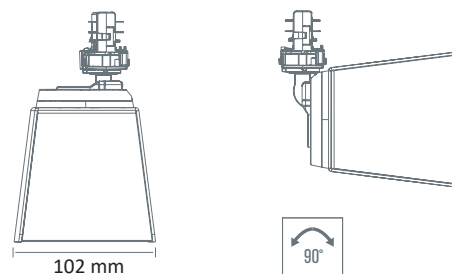

### PERFORMANCES

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5051-B LED 3500-830	28,7W	3481 lumens	121,5 lm/W	3 000 K	80	D
PR 5051-B LED 3500-840	28,7W	3572 lumens	124,5 lm/W	4 000 K	80	D
PR 5051-B LED 3500-930	35,5W	3320 lumens	93,5 lm/W	3 000 K	90	E
PR 5051-B LED 3500-940	35,5W	3549 lumens	100 lm/W	4 000 K	90	E
PR 5051-B LED 4000-830	35,5W	4080 lumens	114,5 lm/W	3 000 K	80	D
PR 5051-B LED 4000-840	35,5W	4187 lumens	118 lm/W	4 000 K	80	D