

LS 5017-K LED

TRACK SUSPENDED LUMINAIRE

- Track suspended luminaire for LINEAR LED module, maximum 8 400 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 172,9 lm/W
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Cluster optical composed of lenses, polycarbonate (PC)
- Static heat sink
- Optical compartment protected against shocks and dust
- Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)


Driver(s)



Standards

Class I | IP 20 | 650° | IK 10

Dimensions

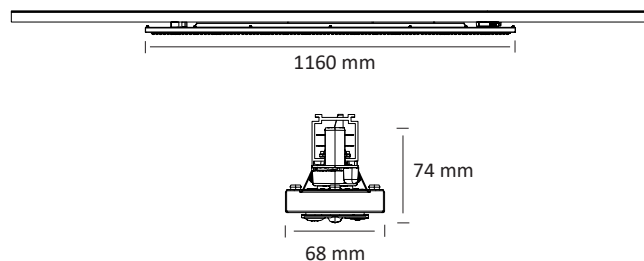

Colour(s)



Light distribution




SYM DASY ELL INT SI


ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5017-K LED 4600-830	26,4W	30W	4800 lumens	160 lm/W	3000 K	80	C
LS 5017-K LED 4600-840	26,4W	30W	5040 lumens	168 lm/W	4000 K	80	C
LS 5017-K LED 7000-830	40,6W	44,6W	6960 lumens	156 lm/W	3000 K	80	C
LS 5017-K LED 7000-840	40,6W	44,6W	7300 lumens	163,6 lm/W	4000 K	80	C
LS 5017-K LED 8000-830	44,2W	48,6W	8000 lumens	164,6 lm/W	3000 K	80	C
LS 5017-K LED 8000-840	44,2W	48,6W	8400 lumens	172,9 lm/W	4000 K	80	C

TECHNICALS INFORMATION


Intensive :
LOR 90 %

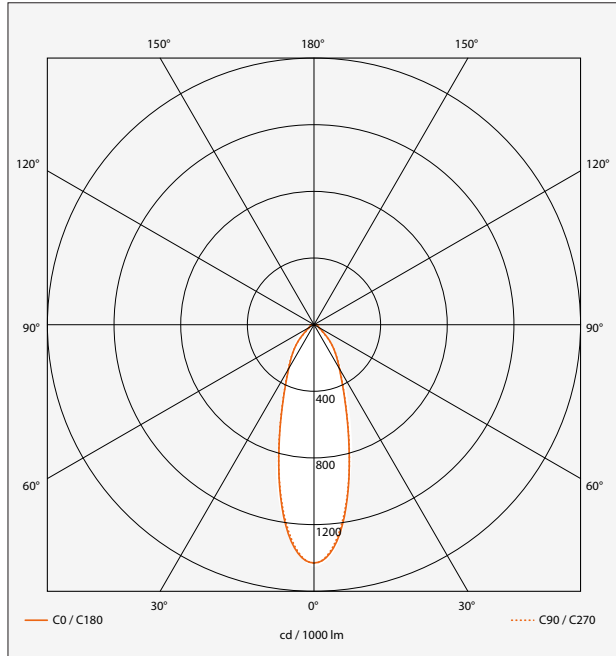


Mid-intensive
LOR 96 %

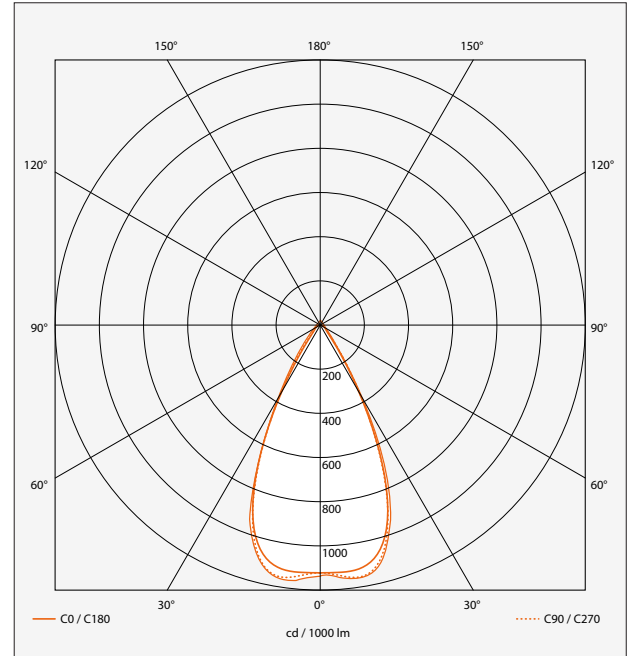

Elliptical
LOR 96,5 %

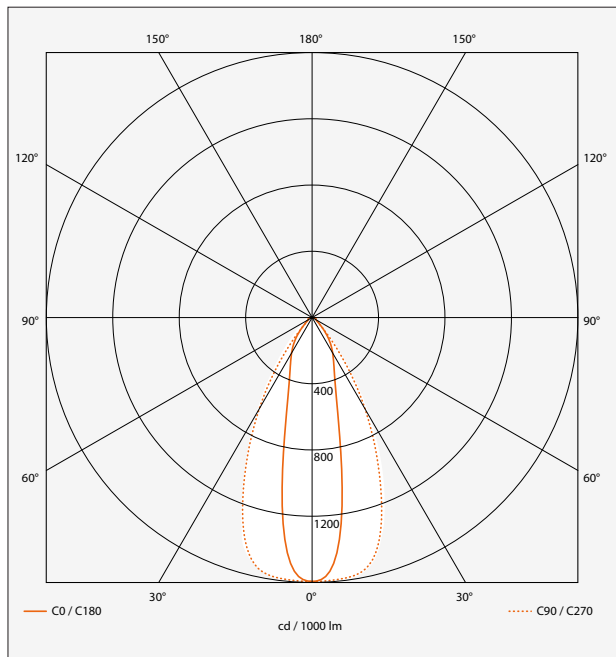

Symmetrical
LOR 97 %

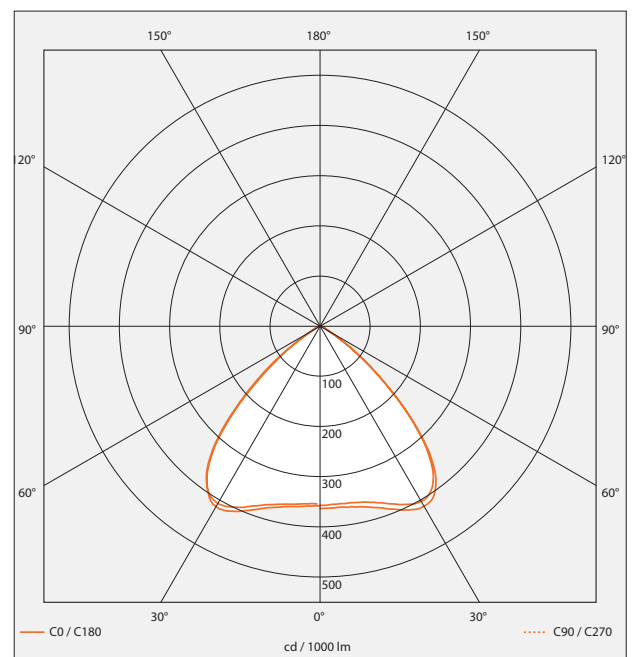


TECHNICALS INFORMATION

Double asymmetrical:
LOR 97 %



DASY

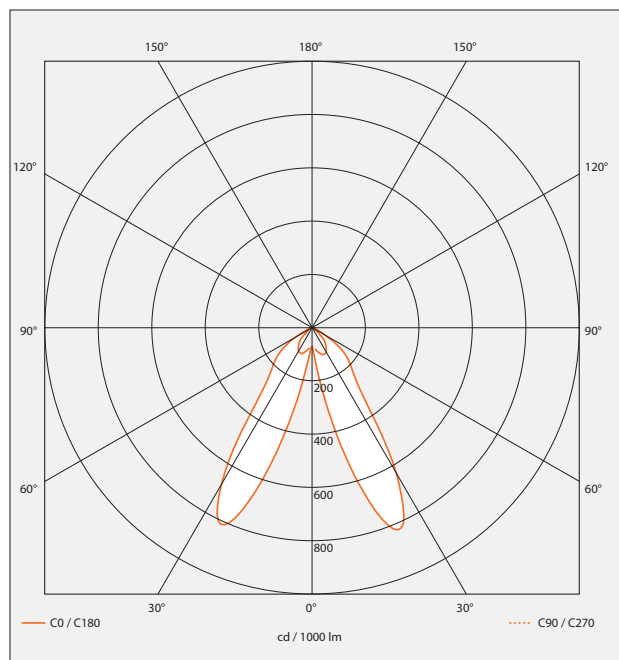


ADVISED CONFIGURATION

(level of illumination depreciated at 0.80)


TYPE A REFLECTOR (TRACK INSTALLED AT 3M HEIGHT)

- CONFIGURATION :
 - DASY 8000 LUMENS
- FACING : 1M40
 - DE 0,7M À 2M10


Aisle width
1 800 mm

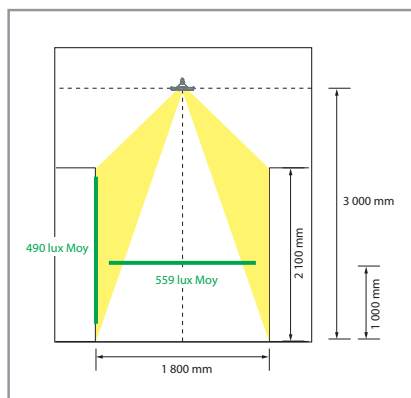

Aisle width
2 000 mm

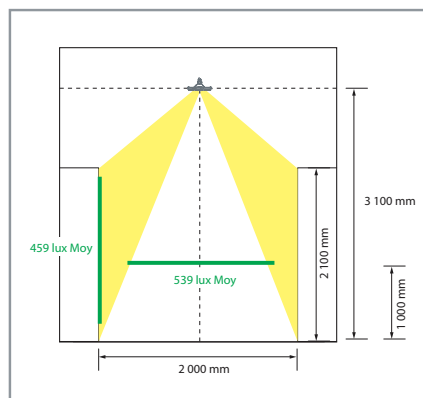

Aisle width
2 200 mm

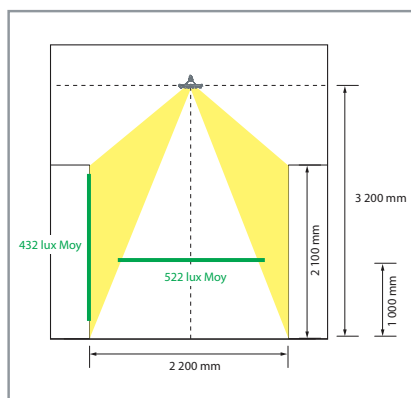

Aisle width
2 500 mm

