

ET 2207 LED



Colour(s)

EXTRA PROTECTED LUMINAIRES ■ LED

- Waterproof IP 65 wall mounted luminaire for LINEAR LED module, maximum 1660 lumens
- CRI of 80
- MacAdam Ellipse : 6 SDCM
- Available in 3 000 K, 4 000 K and 5 000 K
- Up to 50 000 hours lamp life
- Luminous efficiency of system up to 95,5 lm/W
- Polycarbonate basin
- **Driver(s)** : Fixed
- **Option(s)** : infrared presence detector (PIR), colored bezel (black, white, grey, bronze, aluminium, chrome, brass)

Driver(s)




Standards

Class II | IP 65 | 650° | IK10

Light distribution



Dimensions

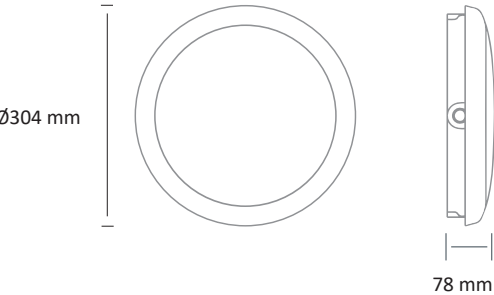

The luminaire is adjustable in luminous flux and color temperature during installation.



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
ET 2207 LED-800-830	9 W	810 lumens	90 lm/W	3 000 K	80	E
ET 2207 LED-800-840	9 W	860 lumens	95,5 lm/W	4 000 K	80	E
ET 2207 LED-800-850	9 W	860 lumens	95,5 lm/W	5 000 K	80	E
ET 2207 LED-1000-830	12 W	1080 lumens	90 lm/W	3 000 K	80	E
ET 2207 LED-1100-840	12 W	1140 lumens	95 lm/W	4 000 K	80	E
ET 2207 LED-1100-850	12 W	1140 lumens	95 lm/W	5 000 K	80	E
ET 2207 LED-1500-830	18 W	1560 lumens	86,6 lm/W	3 000 K	80	E
ET 2207 LED-1600-840	18 W	1660 lumens	92,2 lm/W	4 000 K	80	E
ET 2207 LED-1600-850	18 W	1660 lumens	92,2 lm/W	5 000 K	80	E