

## ET 2207 LED



### Colour(s)



## EXTRA PROTECTED LUMINAIRES ■ LED

- Waterproof IP 65 wall mounted luminaire for LINEAR LED module, maximum 2100 lumens
- CRI of 80
- MacAdam Ellipse: 6 SDCM
- Available in 3 000 K, 4 000 K and 5 000 K
- Up to 40 000 hours lamp life
- Luminous efficiency of system up to 100 lm/W
- Polycarbonate basin
- **Driver(s)** : Fixed
- **Option(s)** : infrared presence detector (PIR), colored bezel (black, white, grey, bronze, aluminium, chrome, brass)

### Driver(s)




### Standards

Class II | IP 65 | 650° | IK10

### Light distribution



### Dimensions

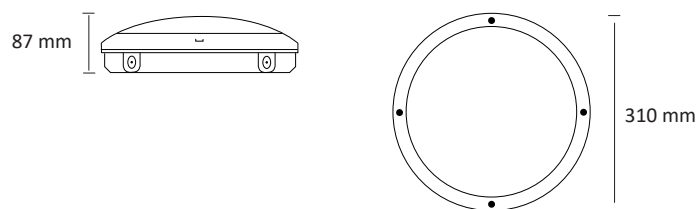

The luminaire is adjustable in luminous flux and color temperature during installation. 

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
ET 2207 LED-1000-830	12W	1100 lumens	96,7 lm/W	3000 K	80
ET 2207 LED-1200-840	12W	1200 lumens	100 lm/W	4000 K	80
ET 2207 LED-1200-850	12W	1200 lumens	100 lm/W	5000 K	80
ET 2207 LED-1300-830	15W	1350 lumens	90 lm/W	3000 K	80
ET 2207 LED-1500-840	15W	1500 lumens	100 lm/W	4000 K	80
ET 2207 LED-1500-850	15W	1500 lumens	100 lm/W	5000 K	80
ET 2207 LED-1900-830	22W	1900 lumens	86,4 lm/W	3000 K	80
ET 2207 LED-2100-840	22W	2100 lumens	95,5 lm/W	4000 K	80
ET 2207 LED-2100-850	22W	2100 lumens	95,5 lm/W	5000 K	80