

# ET 2585 LED



Colour(s)



Ø122 mm



## EXTRA PROTECTED LUMINAIRES ■ LED

- Waterproof circular recessed downlight for LED DOWNLIGHT module, maximum 1 400 lumens
- CRI of 90
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 153,6 lm/W
- Springs in pressure for easier installation
- Matt white aluminium reflector
- Static heat sink
- **Weight:** approx. 0,6 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

### Driver(s)




### Standards

Class II | IP 43 | 650°

### Beam(s)



### Dimensions

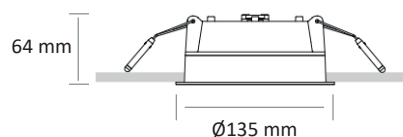

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
ET 2585 LED 1000-930	7W	1050 lumens	150 lm/W	3000 K	90	D
ET 2585 LED 1000-940	7W	1075 lumens	153,6 lm/W	4000 K	90	D
ET 2585 LED 1400-930	10W	1375 lumens	137,5 lm/W	3000 K	90	D
ET 2585 LED 1400-940	10W	1400 lumens	140 lm/W	4000 K	90	D