

ET 2585 LED



Colour(s)



Ø122 mm



EXTRA PROTECTED LUMINAIRES ■ LED

- Waterproof circular recessed downlight for LED DOWNLIGHT module, maximum 1 400 lumens
- CRI of 90
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 153,6 lm/W
- Springs in pressure for easier installation
- White matt aluminium reflector
- Static heat sink
- **Weight:** approx. 0,6 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)



Standards

Class II | IP 43 | 650°


Efficiency energy class



Beam(s)



Dimensions

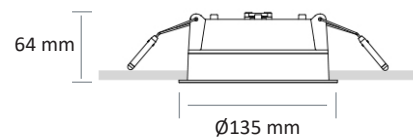

| ITEM | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI |
|----------------------|-------------|---------------|-------------------|--------------------|-----|
| ET 2585 LED 1000-930 | 7W | 1050 lumens | 150 lm/W | 3000 K | 90 |
| ET 2585 LED 1000-940 | 7W | 1075 lumens | 153,6 lm/W | 4000 K | 90 |
| ET 2585 LED 1400-930 | 10W | 1375 lumens | 137,5 lm/W | 3000 K | 90 |
| ET 2585 LED 1400-940 | 10W | 1400 lumens | 140 lm/W | 4000 K | 90 |