



LS 5076 LED PIVOT



Light distribution

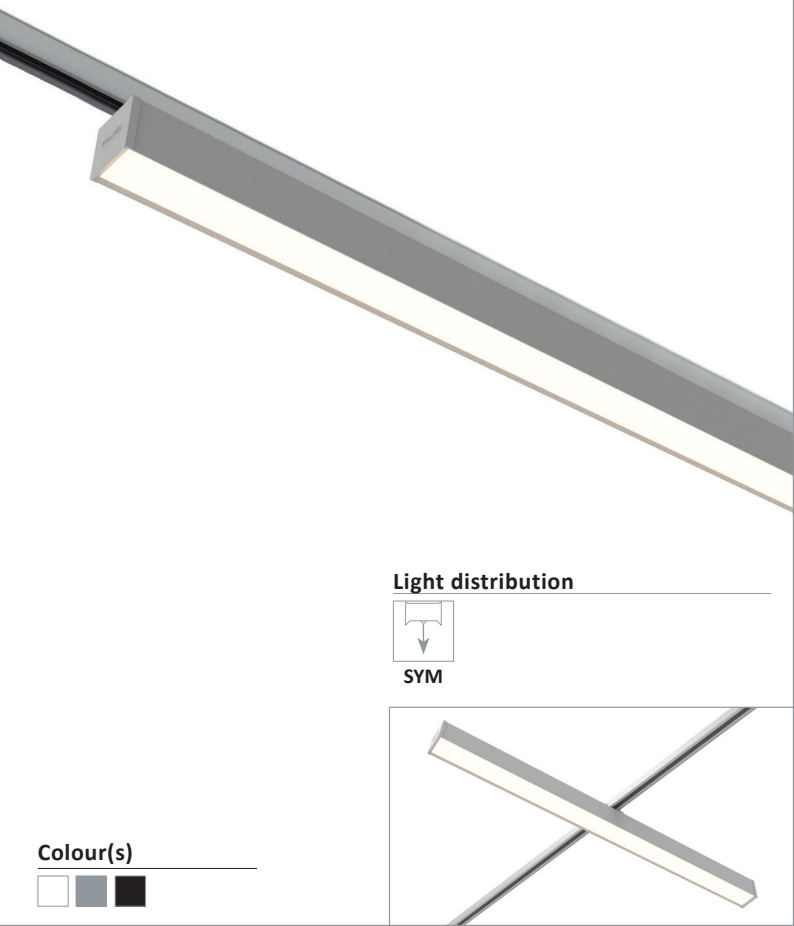

SYM

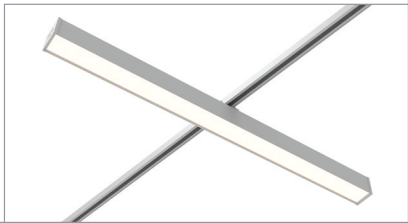

Colour(s)



APPAREILS LED

- Track suspended luminaire for LINEAR LED module, maximum 8 400 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 175,7 lm/W
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Opal diffuser made of polycarbonate (DO)
- Endcaps made of injected polycarbonate
- Static heat sink
- **Weight** : Approx. 3 kg (1162 mm)
- **Standard length** : 1162 mm
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- **Option(s)** : Asymmetric (ASY)


Driver(s)



Standards

Class I | IP 20 | 650° | IK 10

Dimensions

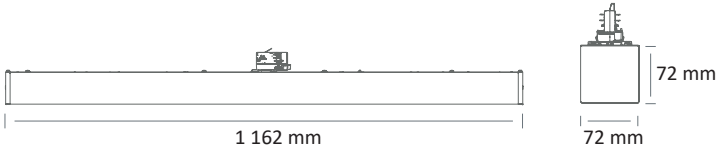

ITEM	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5076 LED 4600-830	2	30W	4800 lumens	160 lm/W	3000 K	80	C
LS 5076 LED 4600-840	2	30W	5040 lumens	168 lm/W	4000 K	80	C
LS 5076 LED 7000-830	2	41,3W	6860 lumens	166,1 lm/W	3000 K	80	C
LS 5076 LED 7000-840	2	41,3W	7200 lumens	174,3 lm/W	4000 K	80	C
LS 5076 LED 8000-830	2	48,6W	8000 lumens	164,6 lm/W	3000 K	80	C
LS 5076 LED 8000-840	2	48,6W	8400 lumens	172,8 lm/W	4000 K	80	C
LS 5076 LED 4600 HE-830	2	26,7W	4480 lumens	167,5 lm/W	3000 K	80	C
LS 5076 LED 4600 HE-840	2	26,7W	4700 lumens	175,7 lm/W	4000 K	80	C
LS 5076 LED 7000 HO-830	2	44,6W	6960 lumens	156 lm/W	3000 K	80	C
LS 5076 LED 7000 HO-840	2	44,6W	7300 lumens	163,7 lm/W	4000 K	80	C