

## LS 5121-B LED



### Colour(s)



## WALL WASHERS LED

- Track suspended luminaire for LINEAR LED module(s), maximum 5 594 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 and 4 000 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 158,5 lm/W
- Optics composed of a lens and an individual reflector for each module
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Static heat sink
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

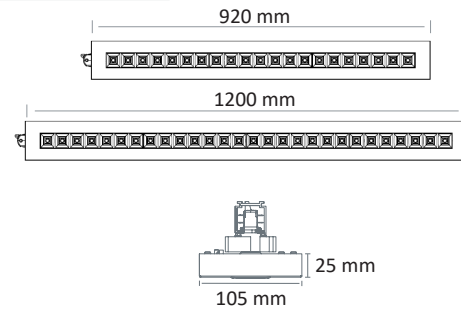

ITEM	LENGHT	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5121-B-LED - 4000-830	920 mm	26,8W	4009 lumens	149,6 lm/W	3000 K	80	C
LS 5121-B-LED - 4000-840	920 mm	26,8W	4196 lumens	156,6 lm/W	4000 K	80	B
LS 5121-B-LED - 5500-830	1200 mm	35,3W	5346 lumens	151,4 lm/W	3000 K	80	C
LS 5121-B-LED - 5500-840	1200 mm	35,3W	5594 lumens	158,5 lm/W	4000 K	80	B