

# PL 2474 LED

## RECESSED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 16 920 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 158 lm/W
- Housing made of extruded aluminium
- Opal (DO) diffuser made of polycarbonate
- Static heat sink
- **Weight:** approx. 5,8 kg (650 mm), 9 kg (950 mm), 12,2 kg (1250 mm), 15 kg (1550 mm), 20,8 kg (1950 mm)
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)



### Colour(s)



### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

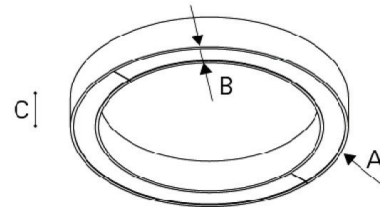

ITEM	DIMENSIONS (AxBxC) mm	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PL 2474 LED 5000-840	ø650x65x85	39W	5640 lumens	144,5 lm/W	4000 K	80	C
PL 2474 LED 8000-840	ø950x65x85	56W	8460 lumens	151 lm/W	4000 K	80	C
PL 2474 LED 11000-840	ø1250x65x85	73W	11 280 lumens	154,5 lm/W	4000 K	80	C
PL 2474 LED 14000-840	ø1550x65x85	89W	14 100 lumens	158 lm/W	4000 K	80	C
PL 2474 LED 17000-840	ø1950x65x85	112W	16 920 lumens	151 lm/W	4000 K	80	C