


# PR 5056 LED ZOOM

## LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 3300 lumens
- CRI of 95
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K, 3 500 K et 4000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 89,2 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Static heat sink
- Aspherical glass lens
- Aluminum body and adjustment ring
- Optical silicone lens
- **Weight** : approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI)

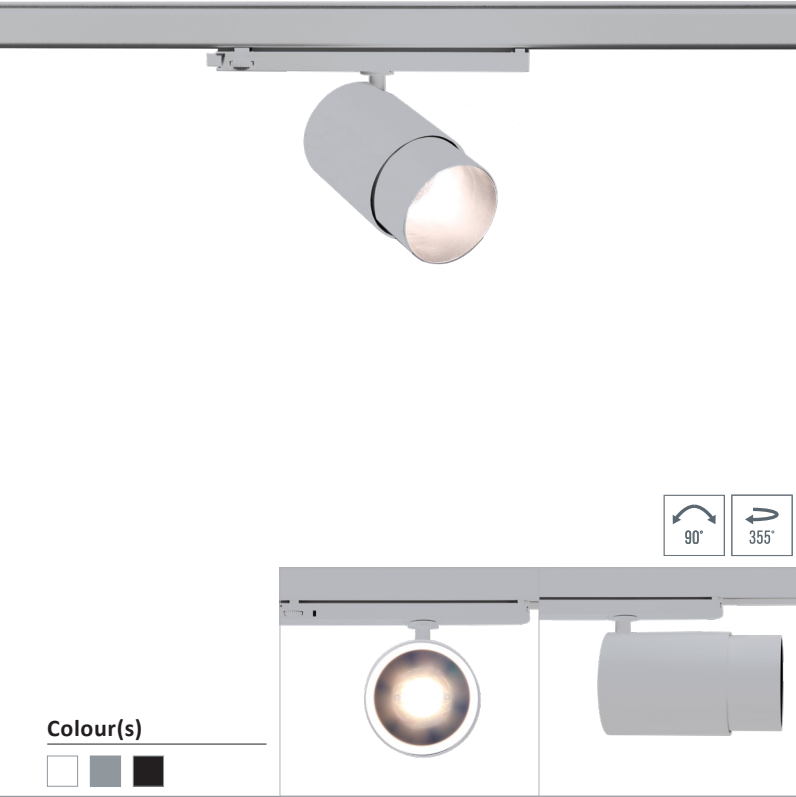

### Driver(s)




### Standards

Class II | IP 20 | 650° | RGO

### Beam(s)




### Dimensions

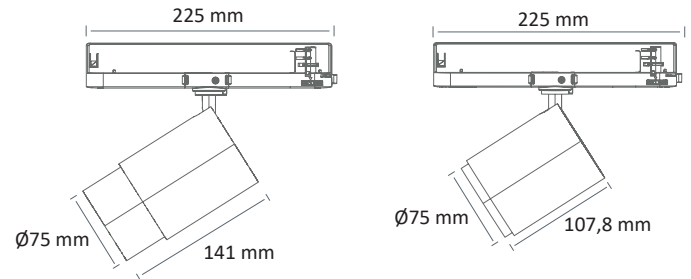

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5056-ZOOM LED 3000-930	31 W	37 W	2933 lumens	79,2 lm/W	3000 K	95	E
PR 5056-ZOOM LED 3200-935	31 W	36,7 W	3158 lumens	86 lm/W	3500 K	95	E
PR 5056-ZOOM LED 3300-940	31 W	37 W	3300 lumens	89,2 lm/W	4000 K	95	E

### Beam adjustment

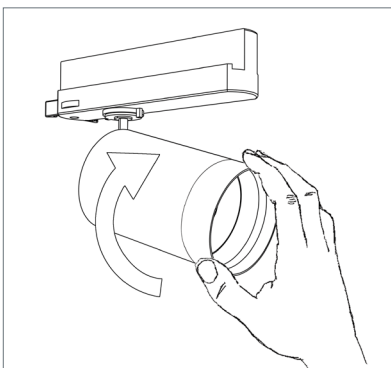


Beam adjustable by rotation of the front ring of the projector

# PR 5056 LED ZOOM

## LIGHT DISTRIBUTION

Beams 12°  
LOR 39,1%

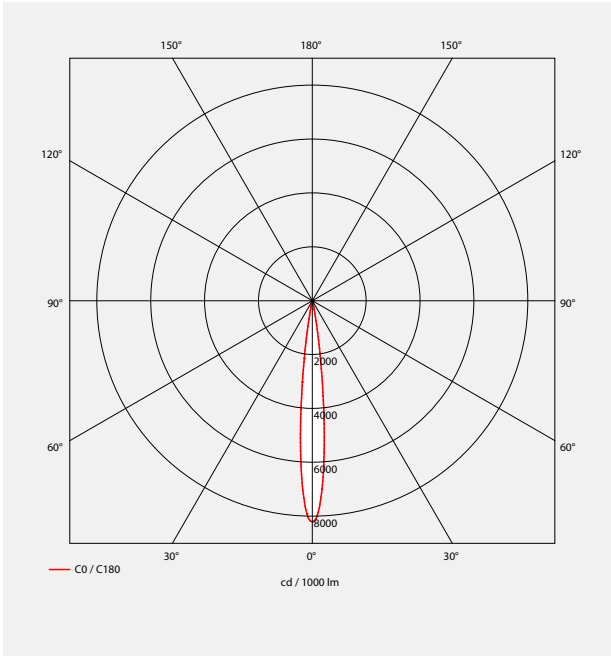

Beams 49°  
LOR 49,3%

