


LS 5121-D LED



Colour(s)

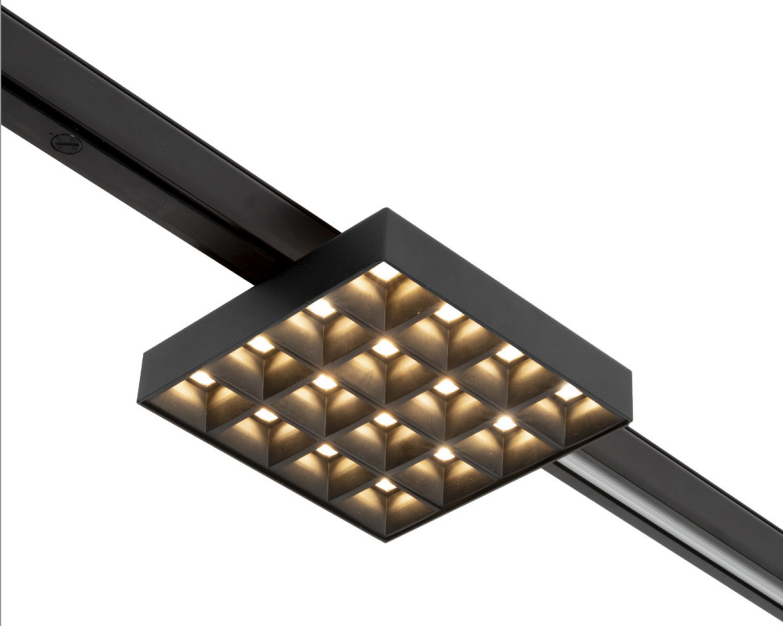

WALL WASHERS LED

- Track suspended luminaire for LINEAR LED module(s), maximum 1636 lumens
- CRI of 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 122,3 lm/W
- Optic composed of a lens and an individual reflector for each module
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Static heat sink
- UGR < 19 for tertiary use
- **Standard body length:** 160 mm
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI), Casambi

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

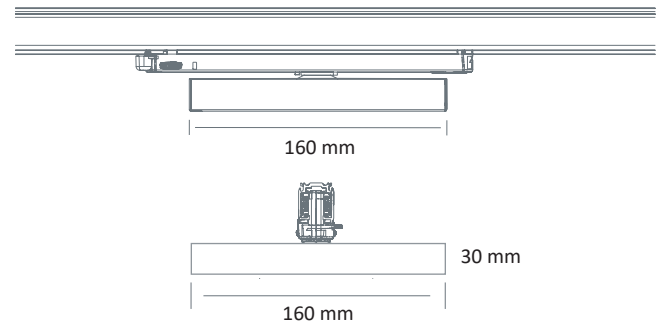

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5121-D LED - 1600-930	13,4W	1567 lumens	117,2 lm/W	3000 K	90	C
LS 5121-D LED - 1600-940	13,4W	1636 lumens	122,3 lm/W	4000 K	90	C