

# PR 5056-A LED GHOST

## LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 3949 lumens
- CRI of 80 and 90
- MacAdam Ellipse: 3 SDCM
- Available in 2 500 K, 3 000 K, 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 137,5 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Static heat sink
- **Weight:** approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s)** : Elliptic reflector (ELL), Barn door(VOL)
- Photobiological risk group 0



### Driver(s)




### Standards

Class II | IP 20 | 650° | GPO

### Beam(s)



### Dimensions

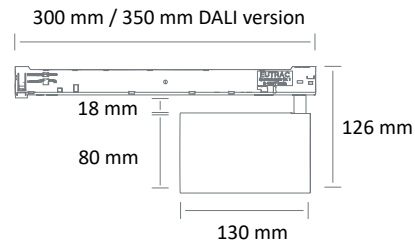

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5056-A GHOST LED 2000-925-boulangerie	Bakery	23,8 W	29 W	2086 lumens	72 lm/W	2500 K	90	-
PR 5056-A GHOST LED 2000-930-boucherie	Butchery	23,8 W	29 W	2158 lumens	74,4 lm/W	3000 K	90	-
PR 5056-A GHOST LED 3300-930	-	23,9 W	28,7 W	3281 lumens	114 lm/W	3000 K	90	E
PR 5056-A GHOST LED 3400-940	-	23,9 W	28,7 W	3384 lumens	118 lm/W	4000 K	90	E
PR 5056-A GHOST LED 3700-830	-	23,9 W	28,7 W	3714 lumens	127,7 lm/W	3000 K	80	D
PR 5056-A LED GHOST 3900-840	-	23,9 W	28,7 W	3949 lumens	137,5 lm/W	4000 K	80	D

### Option(s)




ELL




VOL

**LIGHT DISTRIBUTION**


Beams 16,5°  
LOR 87%

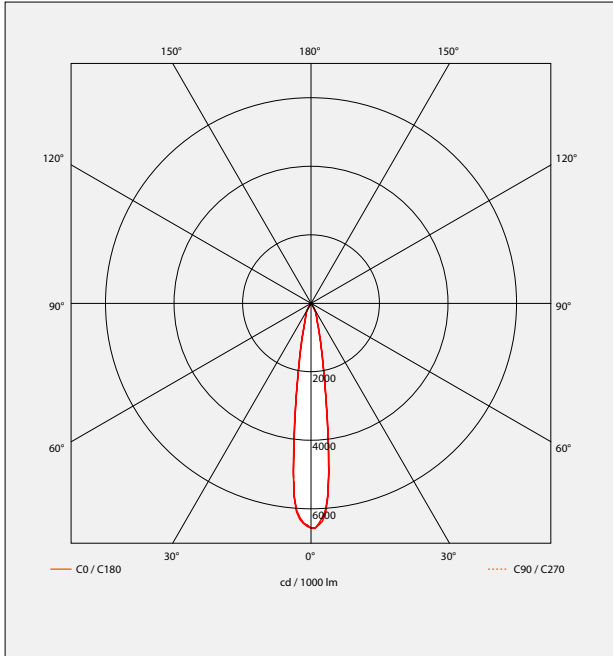


Beams 33°  
LOR 89%

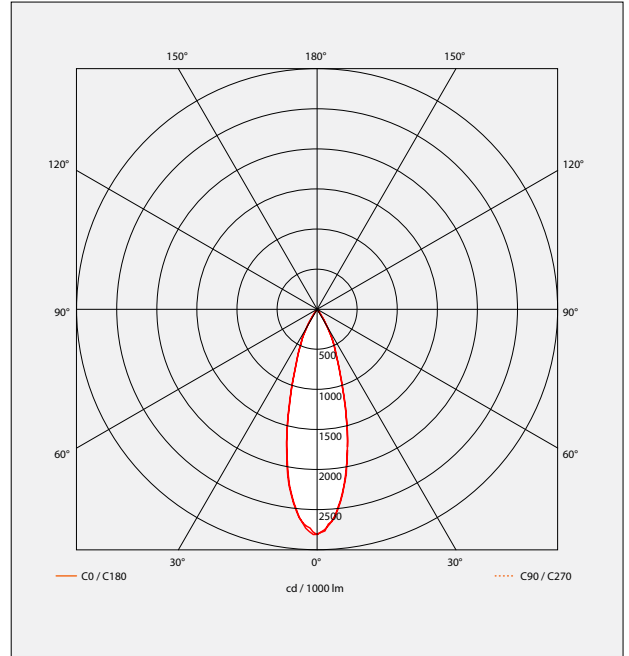

Beams 42°  
LOR 88%

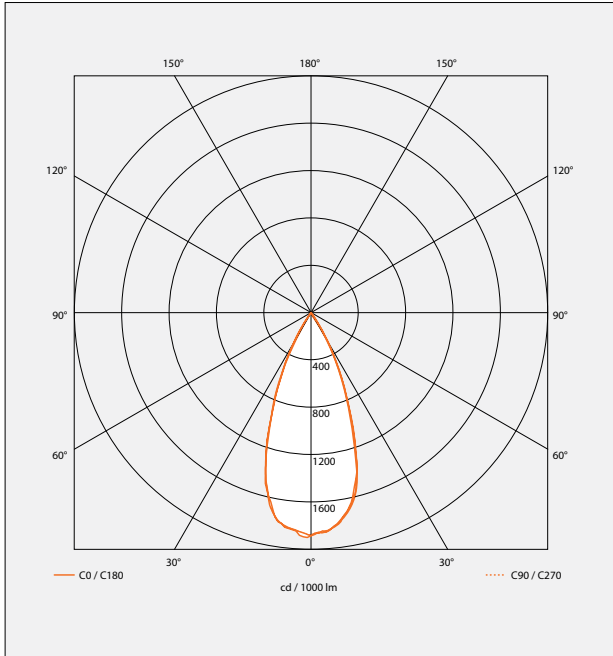

Beams 59°  
LOR 88%

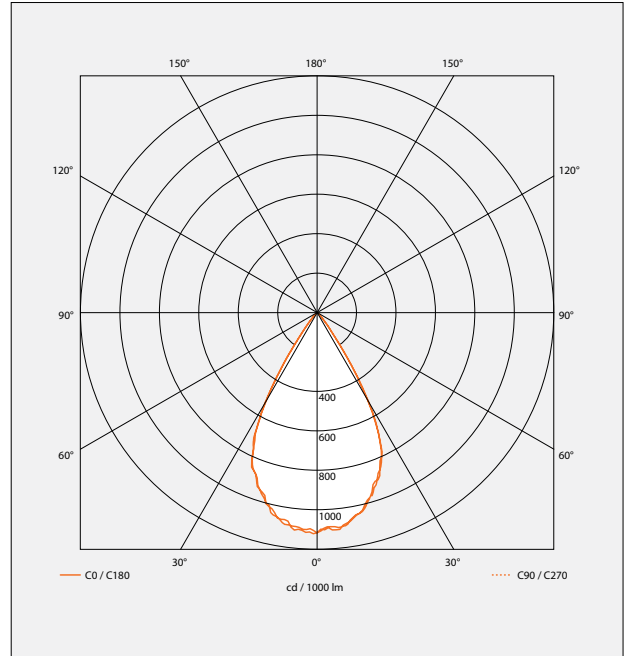

# PR 5056-A LED GHOST

## LIGHT DISTRIBUTION

Elliptical beam  
LOR 92%

