

PR 5056-B LED GHOST



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 3949 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 137,5 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Polycarbonate lens
- Static heat sink
- **Weight:** approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI), Casambi Driver
- **Option(s)** : Barn door (VOL)
- Photobiological risk group 0

Driver(s)




Standards

Class II | IP 20 | 650° | RGO

Beam(s)




Dimensions

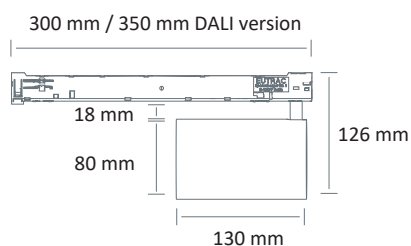


ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	CLASSE D'EFFICACITÉ ÉNERGÉTIQUE
PR 5056-B LED GHOST 3300-930	-	23,9 W	28,7 W	3281 lumens	114,2 lm/W	3000 K	90	E
PR 5056-B LED GHOST 3400-940	-	23,9 W	28,7 W	3384 lumens	117,8 lm/W	4000 K	90	E
PR 5056-B LED GHOST 3700-830	-	23,9 W	28,7 W	3714 lumens	127,7 lm/W	3000 K	80	D
PR 5056-B LED GHOST 3900-840	-	23,9 W	28,7 W	3949 lumens	137,5 lm/W	4000 K	80	D

LIGHT DISTRIBUTION

Beams 20°
LOR 78,5%

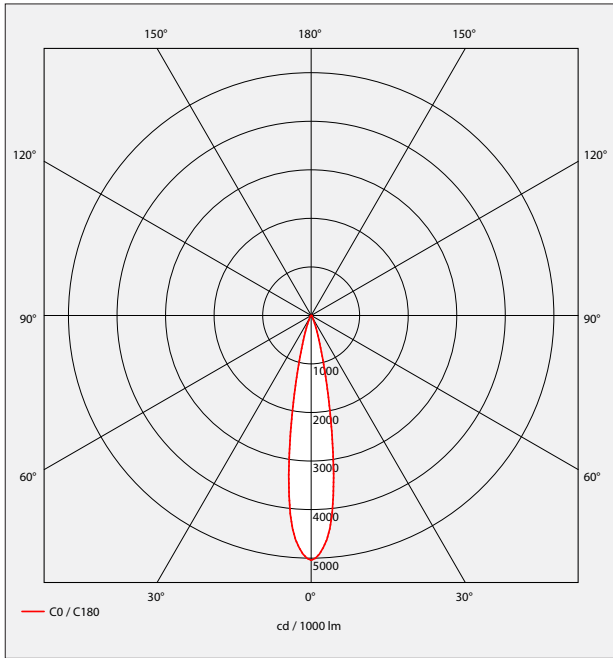

Beams 33°
LOR 75%

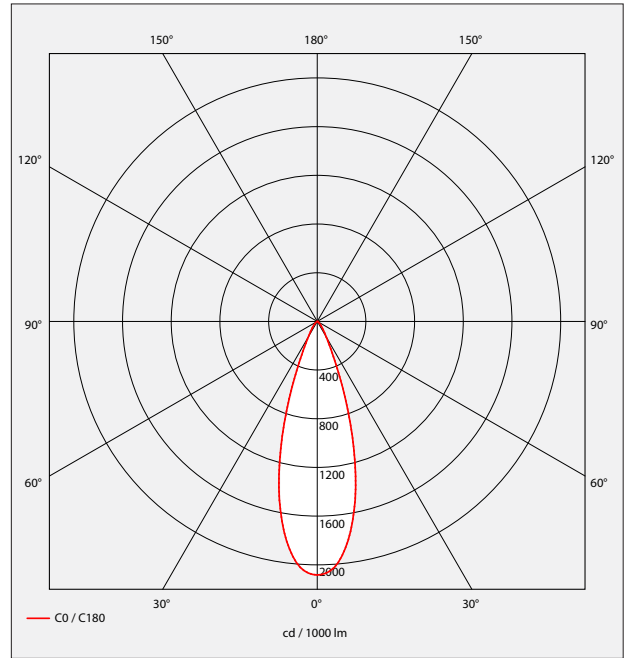

Beams 44°
LOR 70,5%

