






AR 5152-1 LED

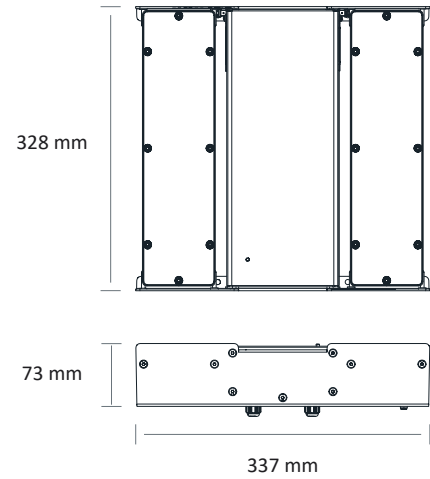

AR 5152-2 LED

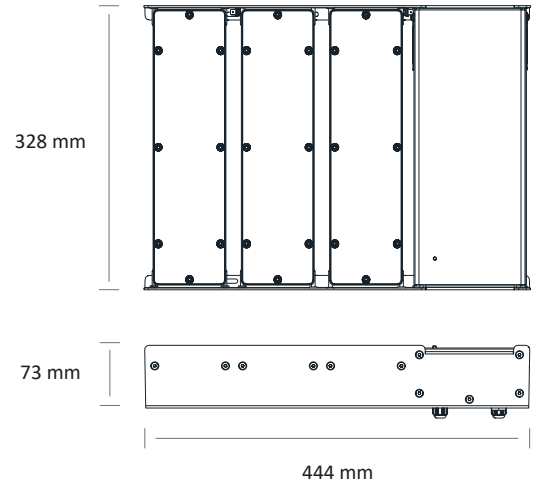

AR 5152-3 LED

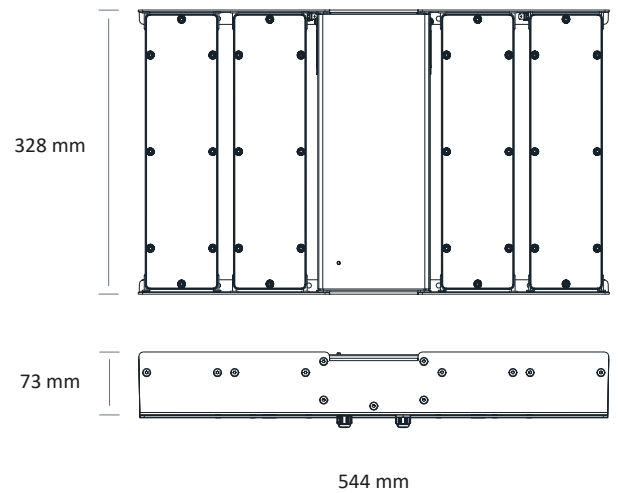

Colour(s)



# AR 5152 LED

- High bay for LED SPOT module double, triple or quadruple, maximum 31 980 lumens
- CRI of 80
- MacAdam Ellipse : 2 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 188,1 lm/W
- **Driver(s)**: Fixed, Dimmable driver DALI (CDIMMDALI)
- **Options** : Brightness and/or presence detection sensor (CEL)
- Special luminaire with an 8 year warranty

## Driver(s)



## Standards

Class I | IP 65 | 650°

## Maintenance



Easy maintenance from below (thanks to a cover with clip)

| ITEM                  | NB OF MODULE(S) | POWER   | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|-----------------------|-----------------|---------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| AR 5152 LED 22000-840 | 2               | 119,2 W | 128,2 W     | 23 100 lumens | 180,2 lm/W        | 4000 K             | 80  | D                       |
| AR 5152 LED 22000-840 | 3               | 114 W   | 122,6 W     | 23 055 lumens | 188,1 lm/W        | 4000 K             | 80  | D                       |
| AR 5152 LED 22000-840 | 4               | 112 W   | 123,1 W     | 23 100 lumens | 187,7 lm/W        | 4000 K             | 80  | D                       |
| AR 5152 LED 30000-840 | 3               | 156 W   | 167,7 W     | 30 600 lumens | 182,4 lm/W        | 4000 K             | 80  | D                       |
| AR 5152 LED 31000-840 | 4               | 158,9 W | 170,8 W     | 31 980 lumens | 187,3 lm/W        | 4000 K             | 80  | D                       |