

PR 5051-D LED



Colour(s):



WALL WASHERS LED

- Orientable track suspended luminaire, LED SPOT module, maximum 4 685 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 2 500 K, 3 000 K, 3 500 K or 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,2 lm/W
- 3-circuits track adaptor
- Housing made of cast aluminium
- Static heat sink
- **Weight:** approx. 1,5 kg
- **Driver(s):** Fixed, Casambi, DALI Gradation Converter (CDIMMDALI)

Driver(s)





Standards

Class I | IP 20 | 650°

Dimensions



Beam(s)

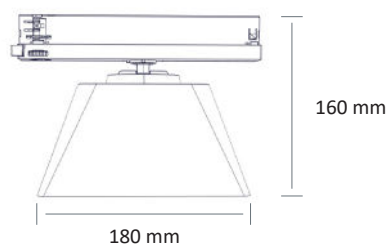

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	SYSTEM EFFICIENCY
PR 5051-D LED 2200-925	Bakery	23,7 W	27,9 W	2171 lumens	77,9 lm/W	2500 K	90	-
PR 5051-D LED 2300-930	Butchery	23,7 W	27,9 W	2158 lumens	74,4 lm/W	3000 K	90	-
PR 5051-D LED 3300-930	-	23,9 W	28,7 W	3281 lumens	114 lm/W	3000 K	90	E
PR 5051-D LED 3400-940	-	23,9 W	28,7 W	3384 lumens	118 lm/W	4000 K	90	E
PR 5051-D LED 3700-830	-	23,9 W	28,7 W	3714 lumens	127,7 lm/W	3000 K	80	D
PR 5051-D LED 3900-840	-	23,9 W	28,7 W	3949 lumens	137,5 lm/W	4000 K	80	D
PR 5051-D LED 3900-930	-	29,4 W	34,6 W	3899 lumens	112,6 lm/W	3000 K	90	E
PR 5051-D LED 4000-940	-	29,4 W	34,6 W	4022 lumens	116 lm/W	4000 K	90	E
PR 5051-D LED 4400-830	-	29,4 W	34,6 W	4415 lumens	127,5 lm/W	3000 K	80	D
PR 5051-D LED 4700-840	-	29,4 W	34,6 W	4685 lumens	135,4 lm/W	4000 K	80	D


CRI 90 High Efficiency (HE) Module Performance

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	SYSTEM EFFICIENCY
PR 5051-D LED HE 3000-930	16,8 W	19,8 W	3010 lumens	152 lm/W	3000 K	90	E
PR 5051-D LED HE 3000-935	16,8 W	19,8 W	2991 lumens	151 lm/W	3500 K	90	E
PR 5051-D LED HE 3000-940	16,8 W	19,8 W	3015 lumens	152,2 lm/W	4000 K	90	E
PR 5051-D LED HE 4000-930	24,1 W	27,7 W	4016 lumens	144,9 lm/W	3000 K	90	E
PR 5051-D LED HE 4000-935	24,1 W	27,7 W	3991 lumens	144 lm/W	3500 K	90	E
PR 5051-D LED HE 4000-940	24,1 W	27,7 W	4023 lumens	145,2 lm/W	4000 K	90	E

LIGHT DISTRIBUTION

Beam : 44x80°
Efficiency 96,5%


ELL

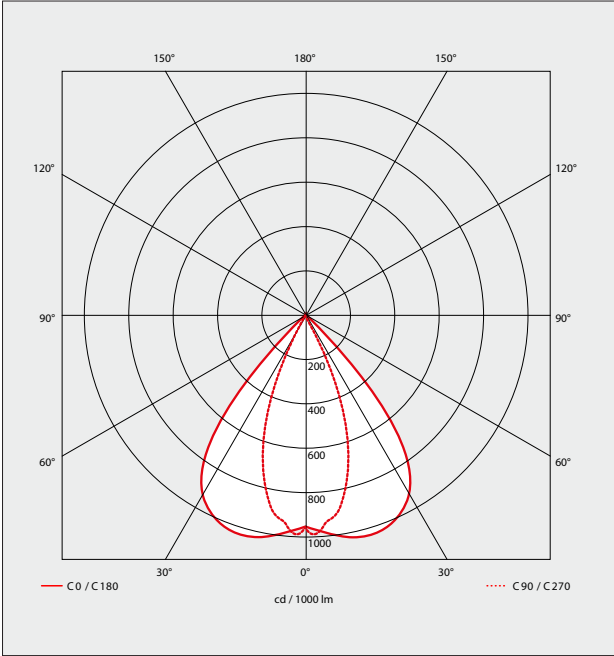

Elliptical :
Ideal for visual and wall-washer lighting.

Beam 30x79°
Efficiency 96,3%

UELL

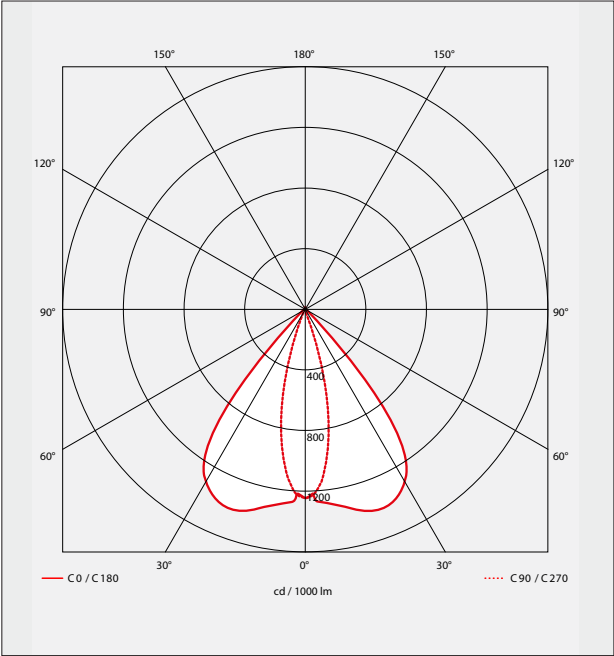

Ultra-elliptical :
Designed for specific lighting of wall shelving.
The installation must be between 3 and 3.5 m high.