

PR 5051-D LED



Colour(s):



WALL WASHERS LED

- Orientable track suspended luminaire, LED SPOT module, maximum 4 023 lumens
- CRI of 90
- MacAdam Ellipse : 2 SDCM
- Available in 2 500 K, 3 000 K, 3 500 K or 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 161,5 lm/W
- 3-circuits track adaptor
- Housing made of cast aluminium
- **Weight** : Approx. 1,5 kg
- **Driver(s)** : Fixed, Dimmable DALI, Casambi, Connect

Convertisseur(s)





Standards

Class I | IP 20 | 650°

Dimensions



Beam(s)

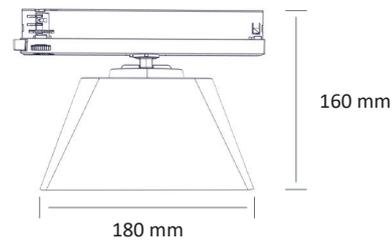

Performance of specialized lighting modules

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	SYSTEM EFFICIENCY
PR 5051-D LED 2200-925	Bakery	23,7 W	27,9 W	2171 lumens	77,9 lm/W	2500 K	90	-
PR 5051-D LED 2300-930	Butchery	23,7 W	27,9 W	2158 lumens	74,4 lm/W	3000 K	90	-


High efficiency performance of the components (HE) CRI 90 with R9>80

ITEM	ELIGIBILITY CEE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5051-D LED HE 3000-930		16,8 W	18,7 W	3010 lumens	161,3 lm/W	3000 K	90	E
PR 5051-D LED HE 3000-935		16,8 W	18,7 W	2991 lumens	160,2 lm/W	3500 K	90	E
PR 5051-D LED HE 3000-940		16,8 W	18,7 W	3015 lumens	161,5 lm/W	4000 K	90	E
PR 5051-D LED HE 4000-930		24,1 W	26,8 W	4016 lumens	150 lm/W	3000 K	90	E
PR 5051-D LED HE 4000-935		24,1 W	26,8 W	3991 lumens	149 lm/W	3500 K	90	E
PR 5051-D LED HE 4000-940		24,1 W	26,8 W	4023 lumens	150,2 lm/W	4000 K	90	E

LIGHT DISTRIBUTION

Beam : 44x80°
Efficiency 96,5%


ELL

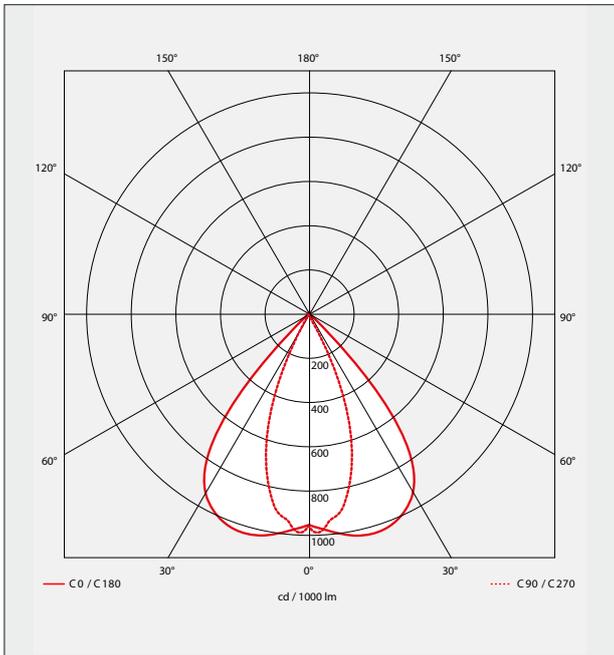

Elliptical :
Ideal for visual and wall-washer lighting.

Beam 30x79°
Efficiency 96,3%

UELL

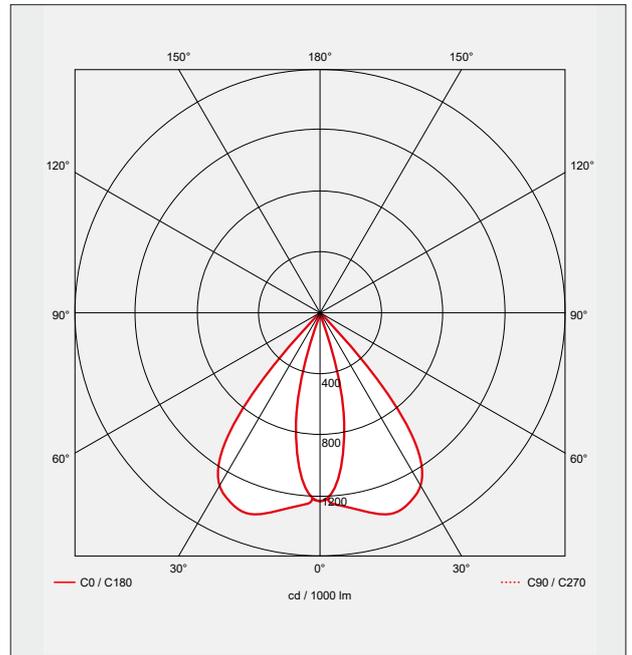

Ultra-elliptical :
Designed for specific lighting of wall shelving.
The installation must be between 3 and 3.5 m high.