


PR 5056 LED ZOOM

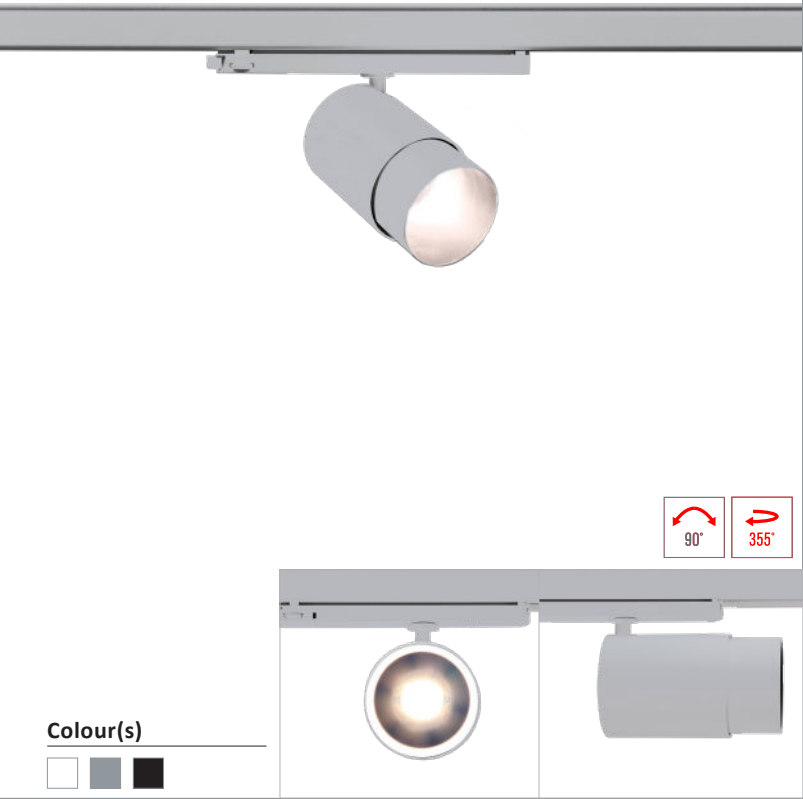

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 3300 lumens
- CRI of 95
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K, 3 500 K et 4000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 89,2 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Static heat sink
- Aspherical glass lens
- Aluminum body and adjustment ring
- Optical silicone lens
- **Weight** : approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)




Standards

Class II | IP 20 | 650° | RG0

Beam(s)




Dimensions

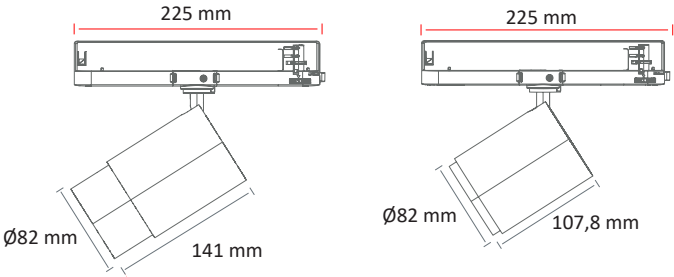

| ITEM                      | POWER | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|---------------------------|-------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| PR 5056-ZOOM LED 3000-930 | 31 W  | 37 W        | 2933 lumens   | 79,2 lm/W         | 3000 K             | 95  | E                       |
| PR 5056-ZOOM LED 3200-935 | 31 W  | 36,7 W      | 3158 lumens   | 86 lm/W           | 3500 K             | 95  | E                       |
| PR 5056-ZOOM LED 3300-940 | 31 W  | 37 W        | 3300 lumens   | 89,2 lm/W         | 4000 K             | 95  | E                       |


Beam adjustment

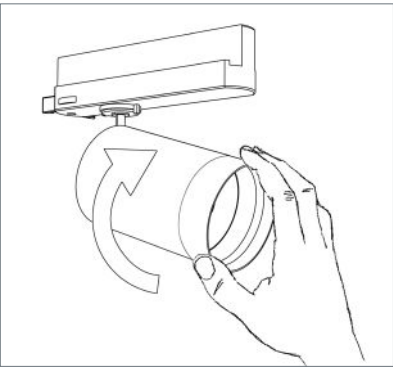

Beam adjustable by rotation of the front ring of the projector

LIGHT DISTRIBUTION

Beams 12°  
LOR 39,1%

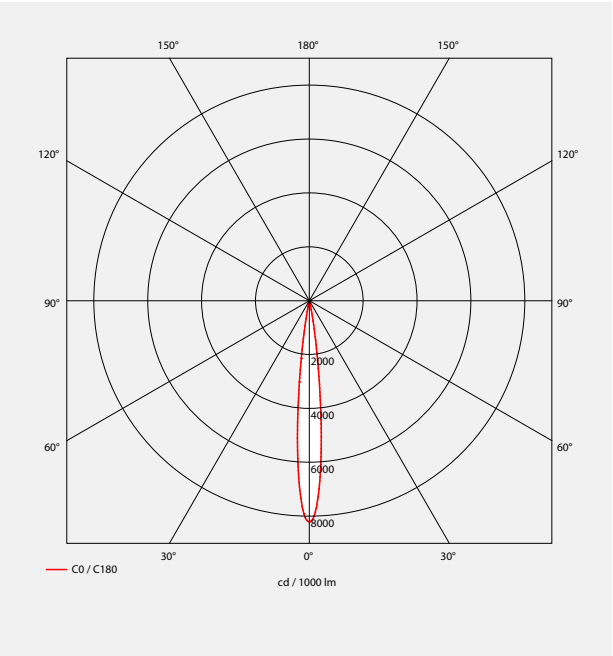

Beams 49°  
LOR 49,3%

