


■ LS 2465 LED



Colour(s)

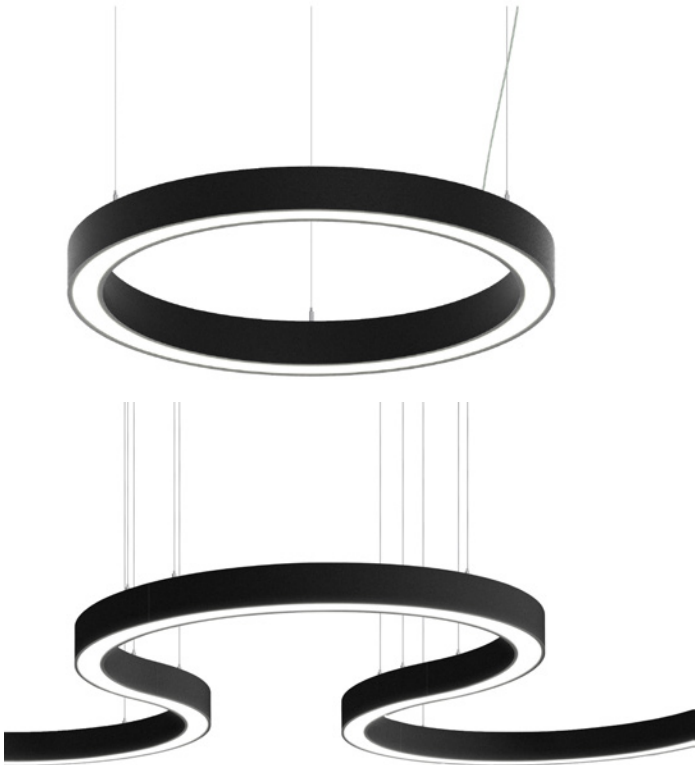

SUSPENDED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 9 761 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 80 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 109 lm/W
- Housing made of extruded aluminium profile
- Opal polycarbonate diffuser
- **Weight** : Approx. 5,8 kg (600 mm), 9 kg (900 mm), 12,2 kg (1200 mm), 15 kg (1500 mm)
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Transparent power cable, suspension, micro-prismatic diffuser, junction kit, piton cover, version with indirect lighting

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)




Dimensions

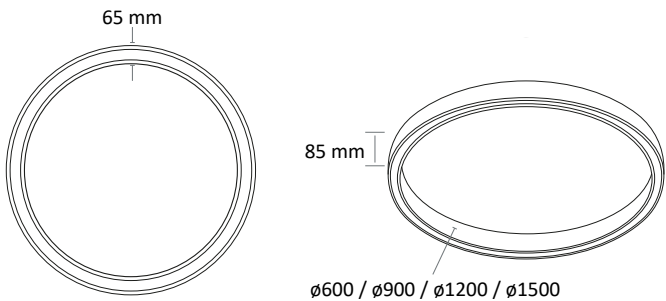

| ITEM                 | DIMENSIONS<br>IN MM | CONSUMPTION | LUMINOUS FLUX | SYSTEM<br>EFFICIENCY | COLOUR<br>TEMPERATURE | CRI | EFFICIENCY<br>ENERGY CLASS |
|----------------------|---------------------|-------------|---------------|----------------------|-----------------------|-----|----------------------------|
| LS 2465 LED 4000-830 | ø600x65x85          | 38 W        | 3823 lumens   | 101 lm/W             | 3 000 K               | 80  | B                          |
| LS 2465 LED 4000-840 | ø600x65x85          | 38 W        | 3993 lumens   | 105 lm/W             | 4 000 K               | 80  | B                          |
| LS 2465 LED 5000-830 | ø900x65x85          | 54 W        | 5522 lumens   | 102 lm/W             | 3 000 K               | 80  | B                          |
| LS 2465 LED 5000-840 | ø900x65x85          | 54 W        | 5768 lumens   | 107 lm/W             | 4 000 K               | 80  | B                          |
| LS 2465 LED 8000-830 | ø1200x65x85         | 77 W        | 8071 lumens   | 105 lm/W             | 3 000 K               | 80  | B                          |
| LS 2465 LED 8000-840 | ø1200x65x85         | 77 W        | 8430 lumens   | 109 lm/W             | 4 000 K               | 80  | B                          |
| LS 2465 LED 9000-830 | ø1500x65x85         | 91 W        | 9346 lumens   | 103 lm/W             | 3 000 K               | 80  | B                          |
| LS 2465 LED 9000-840 | ø1500x65x85         | 91 W        | 9761 lumens   | 107 lm/W             | 4 000 K               | 80  | B                          |

Accessories




■ **LS 2465 LED**


Module(s)




1/2




1/4



1/8



1/16



Straight

