


■ LS 5177 LED

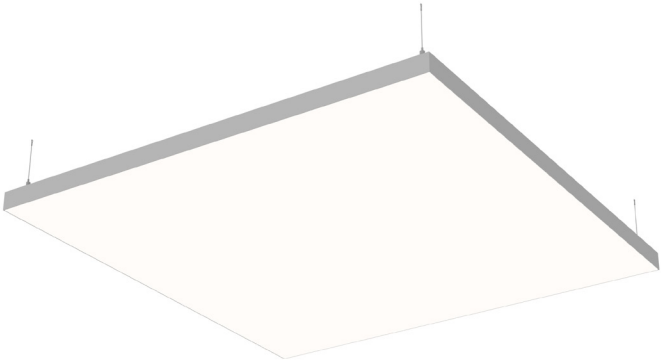

Colour(s)

SUSPENDED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 20 000 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K et 4 000 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 176,9 lm/W
- Housing in painted aluminium profile
- Diffusing lens of stretched canvas type
- **Weight** : Approx. 50 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Canvas print

Driver(s)

C
FIXED


C
DIMM
DALI

Standards

Class I | IP 20 | 650°

Beam(s)

Dimensions

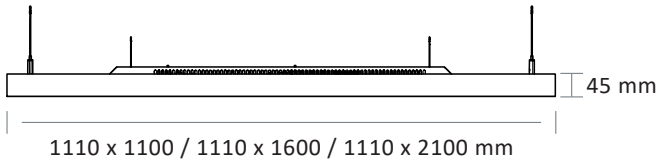

ITEM	DIMENSION	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5177 LED 10000-840	1110 x 1100	57 W	10 000 lumens	175 lm/W	4000 K	80	D
LS 5177 LED 15000-840	1110 x 1600	84,8 W	15 000 lumens	176,9 lm/W	4000 K	80	D
LS 5177 LED 20000-840	1110 x 2100	114 W	20 000 lumens	175 lm/W	4000 K	80	D