

PR 5140-A LED ICOB



Colour(s)

90°

355°

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 3 751 lumens
- CRI of 90
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,7 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Aluminium reflective optics
- Interchangeable ICOB module
- **Weight** : Approx. 0,9 kg
- **Driver(s)** : Fixed, Gradation DALI (CDIMMDALI), Casambi, Connect
- **Option(s)** : Elliptical reflector (ELL), Shutter (VOL), Concealed in-rail converter (Ghost)
- Photobiological risk group 1

Driver(s)

FIXE

C
DIMM
DALI

CASAMBI

CONNECT

Standards

Class II | IP 20 | 650° | RG1

Beam(s)

20°

30°

40°

60°

ELL

Dimensions

166 mm (Fixed) / 263 mm (DALI)

Ø72 mm

115 mm

135 mm

A product equipped with ICOB technology is provided with a mechanism enable to change the module on the GH36d-4 socket by a simple quarter-turn rotation.

ICOB version

1

2

3

Option(s)

ELL

GHOST

VOL


PR 5140-A LED ICOB

High efficiency performance of the components (HE) CRI 90


ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5140-A LED ICOB HE 2800-930	16,7 W	18,6 W	2829 lumens	152,5 lm/W	3000 K	90	E
PR 5140-A LED ICOB HE 2800-935	16,7 W	18,6 W	2811 lumens	151,5 lm/W	3500 K	90	E
PR 5140-A LED ICOB HE 2800-940	16,7 W	18,6 W	2834 lumens	152,7 lm/W	4000 K	90	E
PR 5140-A LED ICOB HE 3800-930	23,9 W	26,6 W	3745 lumens	141 lm/W	3000 K	90	E
PR 5140-A LED ICOB HE 3800-935	23,9 W	26,6 W	3721 lumens	140,1 lm/W	3500 K	90	E
PR 5140-A LED ICOB HE 3800-940	23,9 W	26,6 W	3751 lumens	141,3 lm/W	4000 K	90	E

LIGHT DISTRIBUTION

Beams 40°
LOR 88,4%

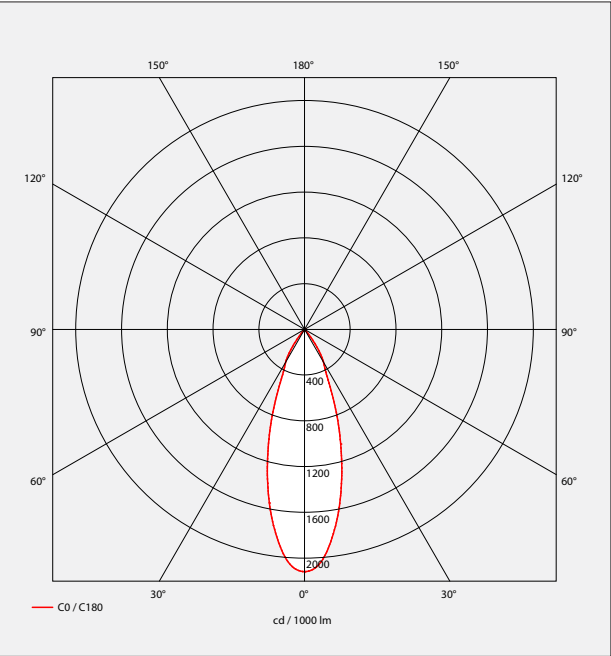

Beams 60°
LOR 93,3%

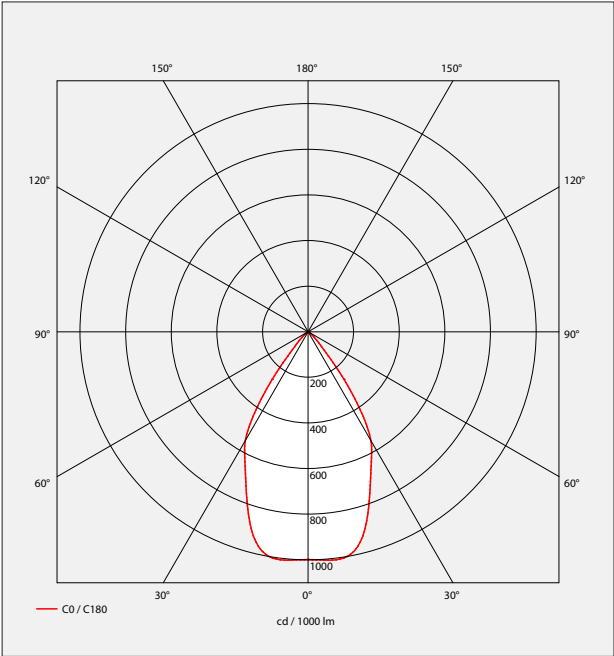

Beams ELL
LOR 87,1%

