

PR 5140-B LED GORGE



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT, maximum 3 930 lumens
- CRI of 90
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,5 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Deep sheath for an optimal visual comfort
- Polycarbonate lens optics
- **Weight** : Approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable DALI, Casambi, Connect
- **Option(s)** : Elliptical reflector (ELL)
- Photobiological risk group 1

Driver(s)




Standards

Class I | IP 20 | 650° | RG1

Beam(s)



Dimensions

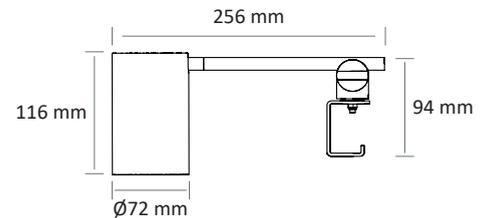

High efficiency performance of the components (HE) CRI 90 with R9>80

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 5140-B LED GORGE HE 3000-930	16,7 W	19,4 W	2956 lumens	152,2 lm/W	3000 K	90	E
PR 5140-B LED GORGE HE 3000-935	16,7 W	19,4 W	2937 lumens	151,2 lm/W	3500 K	90	E
PR 5140-B LED GORGE HE 3000-940	16,7 W	19,4 W	2961 lumens	152,5 lm/W	4000 K	90	E
PR 5140-B LED GORGE HE 4000-930	24 W	27,9 W	3924 lumens	140,6 lm/W	3000 K	90	E
PR 5140-B LED GORGE HE 4000-935	24 W	27,9 W	3899 lumens	139,7 lm/W	3000 K	90	E
PR 5140-B LED GORGE HE 4000-940	24 W	27,9 W	3930 lumens	140,8 lm/W	4000 K	90	E

