


■ LS 5226-B LED

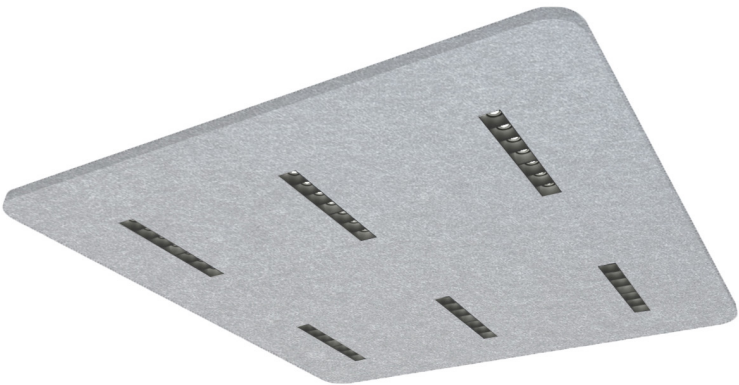

Colour(s)

SUSPENDED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 2 968 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 4 000 K
- 50 000 heures hours lamp life (L80B10)
- Luminous efficiency of system up to 167,7 lm/W
- Each module is equipped with an optic consisting of a lens and an individual reflector
- Laying for the framework
- Housing made of in polyester acoustic panel (PET)
- Certified acoustic performance : αw= 0,95 - Class A
- Static heat sink
- Safety wire included
- Fast connector GST 18/3 included
- UGR < 19
- Block made up of interchangeable LEDs, allowing the frame to be preserved and the modules can be easily replaced to reduce waste and extend the life of the luminaire.
- **Driver(s)** : Fixed (Multi-power via DIP-switch), Dimmable DALI (CDIMMDALI)
- **Option(s)** : Detection cell for brightness and/or presence (CEL)

Driver(s)



Standards


Class II | IP 20 | 650° | RG1

Beam(s)



Dimensions

Custom-made

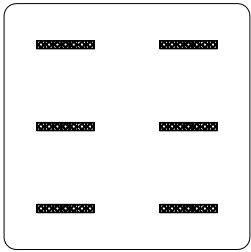

24 mm

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5226-B LED 3000-840	17,7 W	2968 lumens	167,7 lm/W	4 000 K	80	C

■ SIZE EXAMPLES

