

DL 2600-A LED



Ø200 mm



DOWNLIGHT ■ LED

- Recessed downlight for LED SPOT module, maximum 2 117 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 123 lm/W
- Adjustable brackets for easier installation
- Cast aluminium ring
- **Weight** : Approx. 1,3 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Fast connector (CORD), Ring

Driver(s)




Standards

Class I | IP 20 | 650° | RG0 | IK 07

Beam(s)



Dimensions

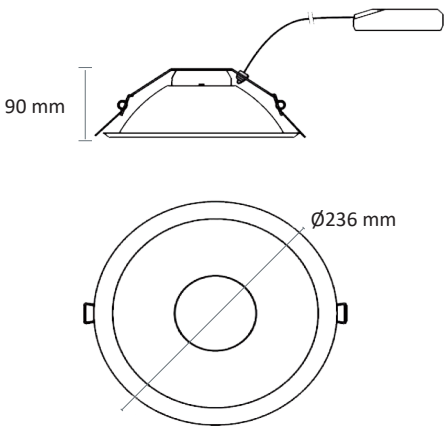

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
DL 2600-A LED 1400-840	11,5 W	1400 lumens	123 lm/W	4000 K	80	C
DL 2600-A LED 2100-830	18 W	2117 lumens	117,6 lm/W	3000 K	80	C

Option(s)



RING