

EO 5236 LED



Colour(s)

Ø118 mm

ORIENTABLE AND ADJUSTABLE . LED

- Recessed orientable for LED SPOT module, maximum 3 930 lumens
- IRC of 90
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,5 lm/W
- Springs in pressure for easier installation
- Cast aluminium ring
- Aluminum reflective optics
- **Weight** : Approx. 1 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- **Option(s)** : Fast connector (CORD)
- Photobiological risk group 1

Driver(s)

PIKE

C
DIMMI
DALI

CASAMBI

CONNECT

Standards

Class I | IP 20 | 650° | RG1

Beam(s)

20°


30°

40°

60°

ELL

Dimensions

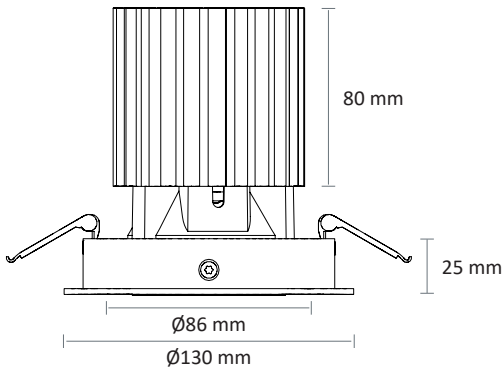

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 5236 LED 3000-930	16,7 W	19,4 W	2956 lumens	152,2 lm/W	3000 K	90	E
EO 5236 LED 3000-935	16,7 W	19,4 W	2937 lumens	151,2 lm/W	3500 K	90	E
EO 5236 LED 3000-940	16,7 W	19,4 W	2961 lumens	152,5 lm/W	4000 K	90	E
EO 5236 LED 4000-930	24 W	27,9 W	3924 lumens	140,6 lm/W	3000 K	90	E
EO 5236 LED 4000-935	24 W	27,9 W	3899 lumens	139,7 lm/W	3000 K	90	E
EO 5236 LED 4000-940	24 W	27,9 W	3930 lumens	140,8 lm/W	4000 K	90	E