

PR 5215 LED



Colour(s)

90°

355°

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 199 lumens
- CRI of 95
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 104,9 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Aluminium reflective optics
- **Weight** : Approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- Photobiological risk group 1

Driver(s)

FIXE

C DIMM DALI

CASAMBI

CONNECT

Standards

Class II | IP 20 | 650° | RG1

Beam(s)

13°


18°

21°

26°

35°

36°

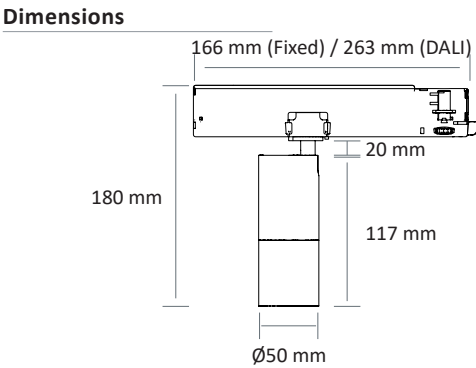

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS	LES	BEAM
PR 5215 LED 1300-930	14,8 W	17,2 W	1354 lumens	78,7 lm/W	3 000 K	95	E	6	13° / 18° / 35°
PR 5215 LED 1400-935	14,8 W	17,2 W	1422 lumens	82,6 lm/W	3 500 K	95	D	6	13° / 18° / 35°
PR 5215 LED 1450-940	14,8 W	17,2 W	1468 lumens	85,3 lm/W	4 000 K	95	D	6	13° / 18° / 35°
PR 5215 LED 1400-930	13,5 W	15,7 W	1492 lumens	95 lm/W	3 000 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1500-935	13,5 W	15,7 W	1574 lumens	100,3 lm/W	3 500 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1550-940	13,5 W	15,7 W	1646 lumens	104,9 lm/W	4 000 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1750-930	17,2 W	20 W	1829 lumens	91,5 lm/W	3 000 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1850-935	17,2 W	20 W	1931 lumens	96,6 lm/W	3 500 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1900-940	17,2 W	20 W	2018 lumens	100,9 lm/W	4 000 K	95	E	9	21° / 26° / 36°
PR 5215 LED 1900-930	19,1 W	22,2 W	1993 lumens	89,7 lm/W	3 000 K	95	E	9	21° / 26° / 36°
PR 5215 LED 2000-935	19,1 W	22,2 W	2104 lumens	94,7 lm/W	3 500 K	95	E	9	21° / 26° / 36°
PR 5215 LED 2100-940	19,1 W	22,2 W	2199 lumens	99 lm/W	4 000 K	95	E	9	21° / 26° / 36°