

PR 5215 LED ICOB



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 199 lumens
- CRI of 95
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 104,9 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Aluminium reflective optics
- **Weight** : Approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- Photobiological risk group 1

Driver(s)




Standards

Class II | IP 20 | 650° | RG1

Beam(s)




Dimensions

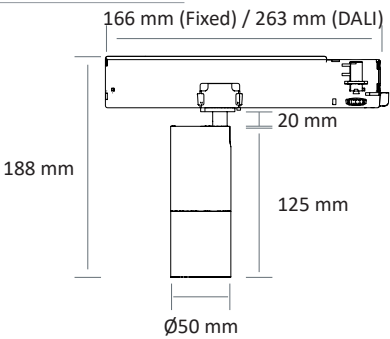

A product equipped with ICOB technology is provided with a mechanism enable to change the module on the GH27d-2 socket by a simple quarter-turn rotation.

ICOB version

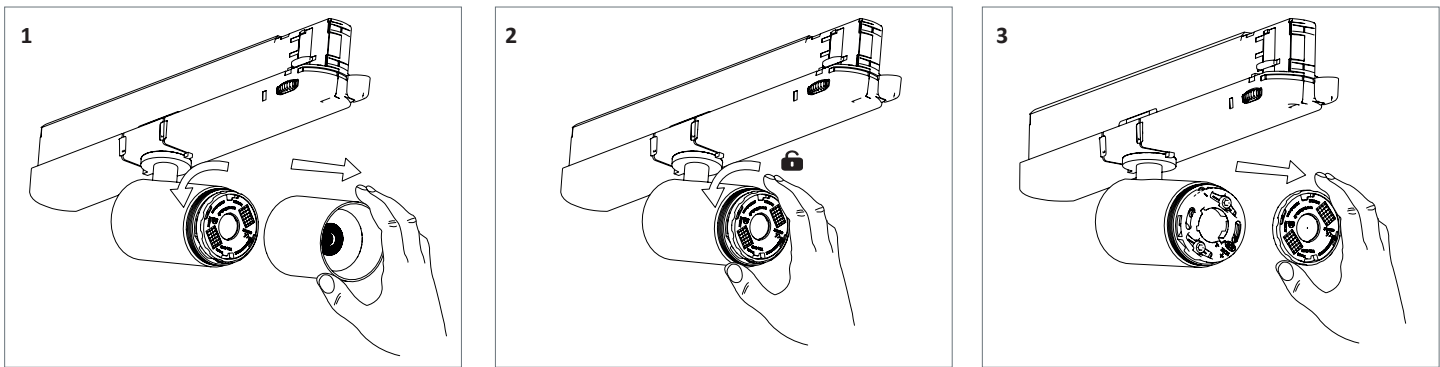

PR 5215 LED ICOB

| ITEM                      | POWER  | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS | LES | BEAM            |
|---------------------------|--------|-------------|---------------|-------------------|--------------------|-----|-------------------------|-----|-----------------|
| PR 5215 LED ICOB 1300-930 | 14,8 W | 17,2 W      | 1354 lumens   | 78,7 lm/W         | 3 000 K            | 95  | E                       | 6   | 13° / 18° / 35° |
| PR 5215 LED ICOB 1400-935 | 14,8 W | 17,2 W      | 1422 lumens   | 82,6 lm/W         | 3 500 K            | 95  | D                       | 6   | 13° / 18° / 35° |
| PR 5215 LED ICOB 1450-940 | 14,8 W | 17,2 W      | 1468 lumens   | 85,3 lm/W         | 4 000 K            | 95  | D                       | 6   | 13° / 18° / 35° |
| PR 5215 LED ICOB 1400-930 | 13,5 W | 15,7 W      | 1492 lumens   | 95 lm/W           | 3 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1500-935 | 13,5 W | 15,7 W      | 1574 lumens   | 100,3 lm/W        | 3 500 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1550-940 | 13,5 W | 15,7 W      | 1646 lumens   | 104,9 lm/W        | 4 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1850-930 | 17,2 W | 20 W        | 1829 lumens   | 91,5 lm/W         | 3 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1850-935 | 17,2 W | 20 W        | 1931 lumens   | 96,6 lm/W         | 3 500 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1900-940 | 17,2 W | 20 W        | 2018 lumens   | 100,9 lm/W        | 4 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 1900-930 | 19,1 W | 22,2 W      | 1993 lumens   | 89,7 lm/W         | 3 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 2000-935 | 19,1 W | 22,2 W      | 2104 lumens   | 94,7 lm/W         | 3 500 K            | 95  | E                       | 9   | 21° / 26° / 36° |
| PR 5215 LED ICOB 2100-940 | 19,1 W | 22,2 W      | 2199 lumens   | 99 lm/W           | 4 000 K            | 95  | E                       | 9   | 21° / 26° / 36° |

UPDATE (MM/DD/YY) : 12/18/2025