

DL 5234 LED ICOB



Colour(s)

□ ■

Ø175 mm



DOWNLIGHTS ■ LED

- Recessed downlight for LED SPOT module, maximum 2 208 lumens
- CRI of 90
- MacAdam Ellipse : 2 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 118,9 lm/W
- Adjustable brackets for easier installation
- Cast aluminium housing
- Low luminance optics UGR<19
- Fast connector (CORD)
- ICOB interchangeable module
- **Weight** : Approx. 1 kg
- **Driver(s)** : Fixed, Dimmable DALI
- Photobiological risk group 1

Driver(s)




Standards

Class I | IP 44 | 650° | RG1

Beam(s)




Dimensions

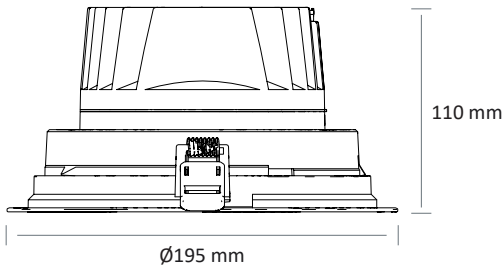

A product equipped with ICOB technology is provided with a mechanism enable to change the module on the GH36d-4 socket by a simple quarter-turn rotation.

ICOB version

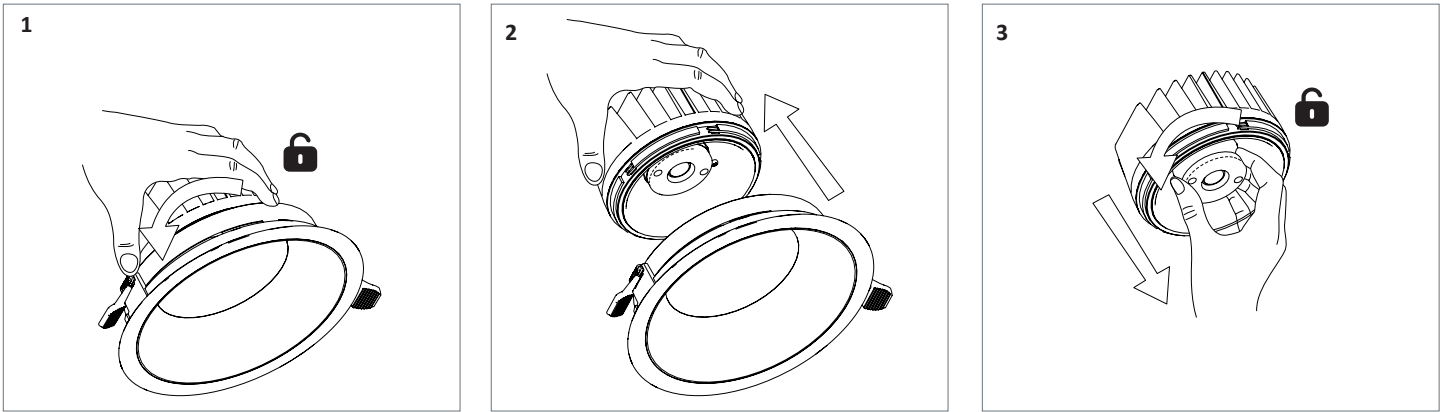

DL 5234 LED ICOB

High efficiency performance of the components (HE) CRI 90

ITEM	CURRENT SETTING	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	INSTALLATION HEIGHT	EFFICIENCY ENERGY CLASS
DL 5234 LED ICOB HE 700-940	150 mA	6,6 W	706 lumens	105,9 lm/W	4 000 K	90	-	E
DL 5234 LED ICOB HE 900-940	200 mA	8,5 W	934 lumens	109,4 lm/W	4 000 K	90	-	E
DL 5234 LED ICOB HE 1100-940	250 mA	10,1 W	1163 lumens	114,8 lm/W	4 000 K	90	3,5 m	E
DL 5234 LED ICOB HE 1400-940	300 mA	11,8 W	1379 lumens	116,8 lm/W	4 000 K	90	-	E
DL 5234 LED ICOB HE 1600-940	350 mA	13,5 W	1601 lumens	118,3 lm/W	4 000 K	90	5 m	E
DL 5234 LED ICOB HE 1800-940	400 mA	15,1 W	1805 lumens	118,9 lm/W	4 000 K	90	-	E
DL 5234 LED ICOB HE 2000-940	450 mA	17,2 W	2018 lumens	117 lm/W	4 000 K	90	-	E
DL 5234 LED ICOB HE 2200-940	500 mA	18,9 W	2208 lumens	116,4 lm/W	4 000 K	90	-	E

Option(s)



Ceiling light kit housing