

DL EXTRA PLAT



Colour(s)



Ø see table



DOWNLIGHTS ■ LED

- Recessed downlight for LED SPOT module, maximum 3000 lumens
- CRI of 80
- MacAdam Ellipse: 5 SDCM
- Adjustable in 3 000 K, 4 000 K and 6 500 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 100 lm/W
- Colour temperature adjustable DIP-switch switches on the converter
- Power adjustable DIP-switch on the converter
- **Weight : Approx. 0,2 kg**
- **Driver(s) : Fixed**
- Photobiological risk group 0

Driver(s)




Standards

Class II | IP 20 | 650° | RGO

Beam(s)



Dimensions

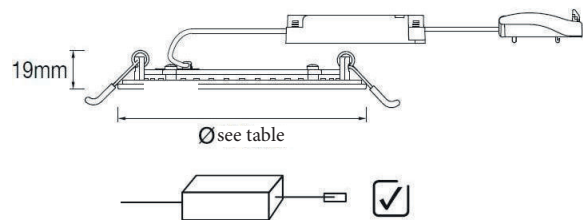

Performance of the components CRI 80

ITEM	OUTER DIAMETER	CUTTING DIAMETER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
DL RIO 700-830-840-865	83 mm	72 mm	7/5,4/2,4 W	700/540/240 lumens	100 lm/W	3000/4000/6500 K	80
DL RIO 1200-830-840-865	118 mm	109 mm	12/8/4,5 W	1200/800/450 lumens	100 lm/W	3000/4000/6500 K	80
DL RIO 1500-830-840-865	168 mm	158 mm	15/10/6 W	1500/1000/600 lumens	100 lm/W	3000/4000/6500 K	80
DL RIO 2000-830-840-865	221 mm	206 mm	20/14/11,5 W	2000/1400/11500 lumens	100 lm/W	3000/4000/6500 K	80
DL RIO 2400-830-840-865	240 mm	225 mm	24/18/10 W	2400/1800/1000 lumens	100 lm/W	3000/4000/6500 K	80
DL RIO 3000-830-840-865	296 mm	282 mm	30/25/20 W	3000/2500/2000 lumens	100 lm/W	3000/4000/6500 K	80