PR 5140-B RGBW LED



LED PROJECTORS

- Adjustable spotlight for SPOT LED module, maximum 2 700 lumens
- CRI of 95
- MacAdam ellipse: 2 SDCM
- RGBW luminaire with adjustable white temperature and dimming via CASAMBI.
- Lifespan 50,000 hours (L80B10)
- System luminous efficacy up to 121.6 lm/W
- 3-circuit track adapter with integrated driver
- Painted welded sheet steel housing.
- Aluminium spotlight body
- **Weight:** Approx. 0.9 kg
- **Driver(s):** Casambi
- Photobiological risk group 1

Driver(s)




Standards


Classe II | IP 20 | 650° | RG1

Beam(s)



Dimensions



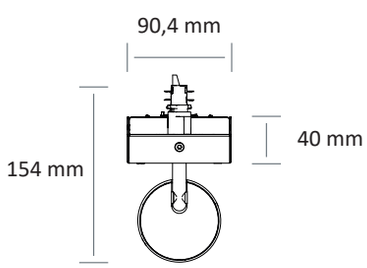

Colour(s)





ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
PR 5140-B LED RGBW LED	12,2 W	395 lumens	32,4 lm/W	ROUGE	
	11,8 W	1 435 lumens	121,6 lm/W	VERT	
	12,7 W	262 lumens	20,6 lm/W	BLEU	
	17 W	1 161 lumens	68,3 lm/W	1 800K	95
	26,85 W	2 452 lumens	91,3 lm/W	3 000K	95
	26,85 W	2 700 lumens	100,5 lm/W	6 500K	95


UPDATE (MM/DD/YY) : 10/13/2026

TRATO Lighting
22, rue Molière - BP369 - 59057 ROUBAIX Cedex 01 (Lille) FRANCE - Tél. : +33 (0) 320 81 50 00 - Email : contact@trato.fr - Web : www.trato.fr


PR 5140-B LED

LIGHT DISTRIBUTION


Beams 20°
LOR 73,7%

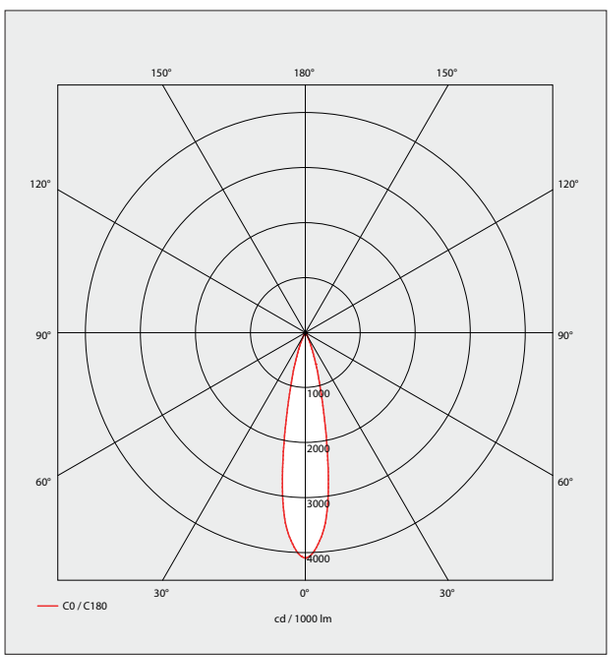

Beams 30°
LOR 78,8%

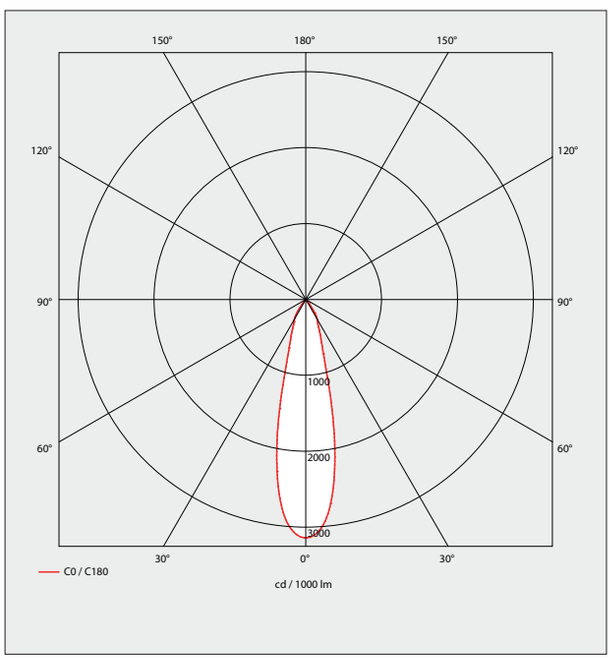

Beams 40°
LOR 78%

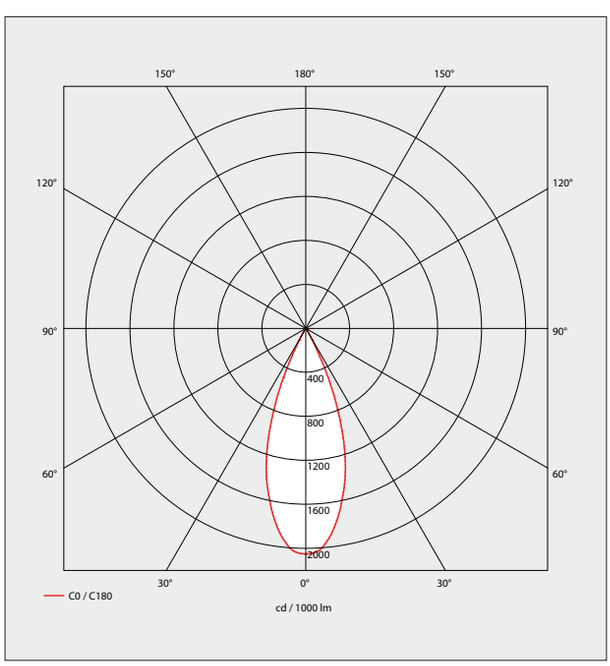

UPDATE (MM/DD/YY) : 10/13/2026