

# AR 3920 LED



### Colour(s)



# HIGH BAY ■ LED

- High bay for LED SPOT module, maximum 10 164 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 165,1 lm/W
- Low luminance optic
- Static heat sink
- **Weight:** approx. 8 kg
- **Separated driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** RAL colour upon request (MC) decorative lining, Fast connector (CORD), Suspension kit (KS)

### Deported Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

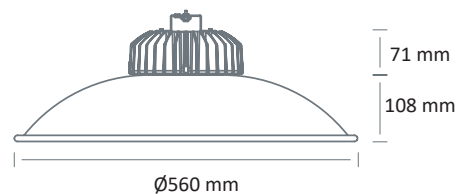

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
AR 3920 LED-8000-830	45,3W	49,3W	7691 lumens	156,1 lm/W	3000 K	80	D
AR 3920 LED-8000-840	45,3W	49,3W	8134 lumens	165,1 lm/W	4000 K	80	D
AR 3920 LED-10000-830	58,9W	64,1W	9630 lumens	150,3 lm/W	3000 K	80	D
AR 3920 LED-10000-840	58,9W	64,1W	10164 lumens	158,6 lm/W	4000 K	80	D

### Option decorative lining (RAL colour upon request)



Black lining

### Power box

