

RB 2331 LED RGB-RGBW IPOO



BATTEN LUMINAIRES / LED FLEX ■ LED

- IPOO colored LED FLEX, 24 volts, for decorative lighting
- Color lighting RGB or RGBW
- Up to 40 000 hours lamp life
- Plug-type connector for power supply and electrical connection of led flex
- 3M self-adhesive led flex for easier installation
- **Weight:** Approx. 0,5 kg
- **Length(s):** Led flex total length 3900 mm, 6000 mm divisible
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **For LED flex larger than 8 W/m, it is recommended to associate an aluminum profile**

Driver(s)




Standards

Class III | IP 00 | 650°

Beam(s)



Dimensions

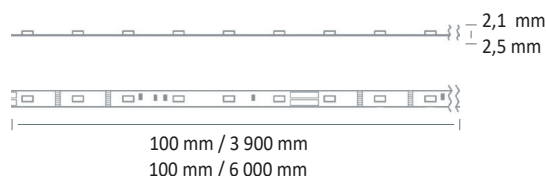

	ITEM	CONSUMPTION (WATT/METER)	RGB FLUX (LUMENS/METER)	WHITE FLUX (LUMENS/METER)	COLOR	LENGTH (M)	CUTTING (MM)	PITCH	EFFICIENCY ENERGY CLASS
EMPHASIZE	RB 2331 LED 700-RGBW-822	10.7 W/m	297 Lm/m	360 Lm/m	RGB+2200K	6 m	150 mm	25 mm	E
	RB 2331 LED 700-RGBW-827	9.8 W/m	297 Lm/m	400 Lm/m	RGB+2700K	6 m	150 mm	25 mm	E
	RB 2331 LED 700-RGBW-830	9.8 W/m	297 Lm/m	400 Lm/m	RGB+3000K	6 m	150 mm	25 mm	E
DECORATE	RB 2331 LED 700-RGBW-840	9.6 W/m	297 Lm/m	400 Lm/m	RGB+4000K	6 m	150 mm	25 mm	E
	RB 2331 LED 700-RGBW-865	9.6 W/m	297 Lm/m	400 Lm/m	RGB+6500K	6 m	150 mm	25 mm	E
	RB 2331 LED 1300-RGBW-822	19.9 W/m	493 Lm/m	720 Lm/m	RGB+2200K	3.9 m	100 mm	16 mm	E
	RB 2331 LED 1300-RGBW-827	17.9 W/m	493 Lm/m	800 Lm/m	RGB+2700K	3.9 m	100 mm	16 mm	E
	RB 2331 LED 1300-RGBW-830	17.9 W/m	493 Lm/m	800 Lm/m	RGB+3000K	3.9 m	100 mm	16 mm	E
	RB 2331 LED 1300-RGBW-840	17.4 W/m	493 Lm/m	800 Lm/m	RGB+4000K	3.9 m	100 mm	16 mm	E
	RB 2331 LED 1300-RGBW-865	17.4 W/m	493 Lm/m	800 Lm/m	RGB+6500K	3.9 m	100 mm	16 mm	E