

# PR 2076 LED GEN2



### Colour(s)



## LED PROJECTORS

- Orientable projector LED SPOT module, maximum 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 145 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium
- Static heat sink
- Optical protection clear glass
- **Adjustable** : 90° and Turnable : 355°
- **Weight** : Approx. 1,3 kg
- **Driver(s)** : Fixed, Dimmable DALI
- **Option(s)** : Flood module

### Driver(s)




### Standards

Class II | IK 02 | IP 20 | 650°

### Beam(s)



### Dimensions

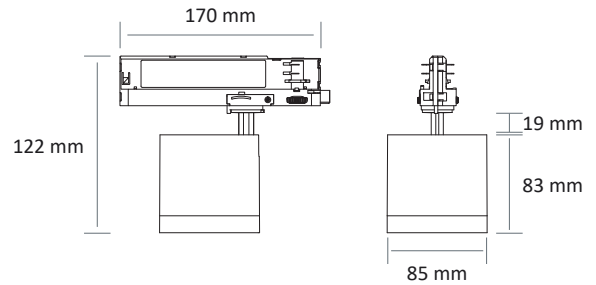

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2076 LED GEN2 2000-930	14 W	1918 lumens	137,9 lm/W	3000 K	90	D
PR 2076 LED GEN2 2000-940	14 W	2016 lumens	145 lm/W	4000 K	90	D
PR 2076 LED GEN2 3500-830	28 W	3700 lumens	132 lm/W	3000 K	80	D
PR 2076 LED GEN2 3500-840	28 W	3875 lumens	138,5 lm/W	4000 K	80	D
PR 2076 LED GEN2 3500-930	25,4 W	3434 lumens	135,2 lm/W	3000 K	90	D
PR 2076 LED GEN2 3500-940	25,4 W	3629 lumens	142,9 lm/W	4000 K	90	D
PR 2076 LED GEN2 4000-930	31,7 W	4143 lumens	130,4 lm/W	3000 K	90	D
PR 2076 LED GEN2 4000-940	29,4 W	4139 lumens	140,6 lm/W	4000 K	90	D
PR 2076 LED GEN2 4500-830	35 W	4275 lumens	122 lm/W	3000 K	80	D
PR 2076 LED GEN2 4500-840	35 W	4500 lumens	128,5 lm/W	4000 K	80	D