

PR 2076 LED

LED PROJECTORS

- Orientable projector LED SPOT module, maximum 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 145 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium
- Static heat sink
- Optical protection clear glass
- **Adjustable:** 90° and Turnable: 355°
- **Weight:** approx. 1,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** food module



Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

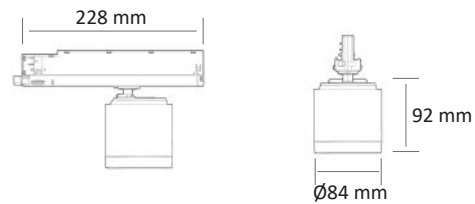

Colour(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2076 LED 2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	D
PR 2076 LED 2000-940	14W	2016 lumens	145 lm/W	4000 K	90	D
PR 2076 LED 3500-830	28W	3700 lumens	132 lm/W	3000 K	80	D
PR 2076 LED 3500-840	28W	3875 lumens	138,5 lm/W	4000 K	80	D
PR 2076 LED 3500-930	25,4 W	3434 lumens	135,2 lm/W	3000 K	90	D
PR 2076 LED 3500-940	25,4 W	3629 lumens	142,9 lm/W	4000 K	90	D
PR 2076 LED 4000-930	31,7 W	4143 lumens	130,4 lm/W	3000 K	90	D
PR 2076 LED 4000-940	29,4 W	4139 lumens	140,6 lm/W	4000 K	90	D
PR 2076 LED 4500-830	35W	4275 lumens	122 lm/W	3000 K	80	D
PR 2076 LED 4500-840	35W	4500 lumens	128,5 lm/W	4000 K	80	D