


- Batten luminaires equipped with 24 volt LED strip, maximum 2500 lumens / meter
- High quality of light with a CRI of 90
- Available in 2700 K, 3000 K, 4000 K and 6500 K
- 50 000 hours lamp life
- Luminous efficiency of system up to 112 lm/W
- Housing made of painted steel, plastic endcap
- Opal diffuser (DO)
- Static heat sink
- **Colour(s)** : Aluminium (ALU)



Driver(s)

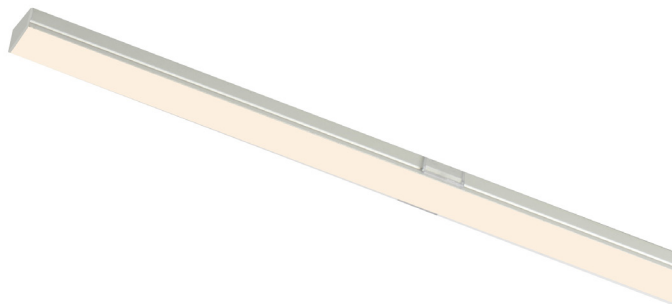

Standards

Class III | IP20 | 650°



Efficiency energy class



Beam(s)



Dimensions

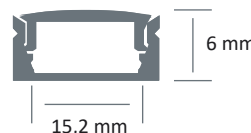

Colour(s)



ITEM	POWER (WATT/METER)	LUMINOUS FLUX (LUMENS/METER)	SYSTEM EFFICIENCY (LM/W)	COLOUR TEMPERATURE	CRI
RG 2328 LED-600-927	5,3	503	93	2700 K	90
RG 2328 LED-600-930	5,3	530	98	3000 K	90
RG 2328 LED-600-940	5,3	600	112	4000 K	90
RG 2328 LED-600-965	5,3	600	112	6500 K	90
RG 2328 LED-1200-927	11	1040	93	2700 K	90
RG 2328 LED-1200-930	11	1095	98	3000 K	90
RG 2328 LED-1200-940	11	1250	112	4000 K	90
RG 2328 LED-1200-965	11	1250	112	6500 K	90
RG 2328 LED-1800-927	19,2	1730	91	2700 K	90
RG 2328 LED-1800-930	19,2	1820	96	3000 K	90
RG 2328 LED-1800-940	16,8	1840	110	4000 K	90
RG 2328 LED-1800-965	16,8	1840	110	6500 K	90
RG 2328 LED-2500-927	26,9	2400	89	2700 K	90
RG 2328 LED-2500-930	26,9	2520	94	3000 K	90
RG 2328 LED-2500-940	23	2500	108	4000 K	90
RG 2328 LED-2500-965	23	2500	108	6500 K	90